AMPAK Technology Inc.

正基科技股份有限公司

SPECIFICATION

PRODUCT NAME：AP6256

REVISION： 5.0(WEB)

DATE：July. 24th, 2026

Customer APPROVED	
Company	
Representative Signature	

PREPARED	REVIEW				APPROVED	DCC ISSUE
	PM	QA	ET			
			PE			
			ME			
			APPROVED			

正基科技股份有限公司

AMPAK Technology Inc.

AP6256

Data Sheet

Address:
6F.-2, No. 23, Huanke 1st Rd., Zhubei City, Hsinchu County 302047,
Taiwan
http://www.ampak.com.tw

Revision

Revision	Date	Description	Revised By
1.0	2017 / 06 / 13	- Preliminary	Richard
1.1	2017 / 09 / 07	- Modify WLAN Specification	Harry
1.2	2017 / 12 / 15	- Modify WLAN/BT Specification	Harry
1.3	2017 / 12 / 20	- Modify WLAN/BT Specification	Harry
1.4	2018 / 08 / 03	- Modify Overview block diagram / General Specification Dimension	Harry
1.5	2018 / 10 / 03	- Modify Bluetooth Specification & format	Harry
1.6	2018 / 12 / 12	- Modify 2.2.2 Voltages/ add PCM & UART Interface Description Timing Diagram Spec	Harry
1.7	2018 / 12 / 28	- Modify 2.2.1 Absolute Maximum Ratings VBAT MAX / ADD ESD Condition	Harry
1.8	2019 / 01 / 08	- Modify 6. Dimensions pin45,46,47 diameter	Harry
1.9	2019 / 03 / 25	- Modify version number C-RD-047D	Harry
2.0	2019 / 09 / 19	- Modify Layout recommended Footprint - Modify Package Information	Richard
2.1	2019 / 09 / 24	- Modify Module Dimensions	Richard
2.2	2019 / 12 / 13	- Modify Bluetooth Specification	Richard
2.5	2020 /03 /02	- Modify 5GHz RF Specification	Ali
2.6	2021 /01 /12	- Modify recommended Footprint	Eason
2.7	2021 /07 /05	- Update Bluetooth Specification	Richard
2.8	2021 /07 /15	- Modify Physical Dimension	Richard
2.9	2022 /08 /17	- Recommended Operating Rating	Ali
3.0	2023 /03 /08	- Modify Bluetooth Specification	Ali
3.1	2023 /06 /29	- Modify UART & PCM Interface description	Ali
3.2	2023 /08 /14	- General Specification	Ali
3.3	2023 /09 /01	- Add 37.4MHz crystal recommended specification	Ali
3.4	2024/05/06	-Modify Module Dimension	Ming
3.5	2024/09/25	- Modify Bluetooth Specifications	Eason
3.6	2025/02/06	- Modify 2.4 GHz RF Specifications	Ali
3.7	2025/04/08	- Update UART Interface Description	Ali
3.8	2025/08/01	- Corrected Unit Descriptions	Ali
3.9	2025/08/14	- Modify Pin Assignment Description	Ali

4.0	2025/08/19	- Modify Package Information	Ali
5.0	2026/07/24	- Update BT block diagram	Sam

AMPAK Technology Inc.
6F.-2, No. 23, Huanke 1st Rd., Zhubei City, Hsinchu County 302047 , Taiwan
http://www.ampak.com.tw

Contents


1. Introduction 2
1.1 Overview 2
1.2 Product Features 3
2. General Specification 4
2.1 General Specification 4
2.2 DC Characteristics 4
2.2.1 Absolute Maximum Ratings 4
2.2.2 Recommended Operating Rating 5
3. Wi-Fi RF Specification 6
3.1 2.4GHz RF Specification 6
3.2 5GHz RF Specification 8
4. Bluetooth Specification 11
4.1 Bluetooth Specification 11
5. Pin Definition 12
5.1 Pin Outline 12
5.2 Pin Assignment 13
6. Dimensions 15
6.1 Module Dimensions 15
6.2 Recommended Footprint 16
7. External clock reference 17
8. Host Interface Timing Diagram 18
8.1 Power-up Sequence Timing Diagram 18
8.2 SDIO Interface Description 20
8.3 PCM Interface Description 27
8.4 UART Interface Description 33
9. Recommended Reflow Profile 36
10. Package Information 37
10.1 Marking 37
10.3 Tape & Reel Packing 38

1. Introduction

1.1 Overview

The AMPAK Technology® AP6256 is a fully Wi-Fi and Bluetooth functionalities module with seamless roaming capabilities and advance security, also it could interact with different vendors' 802.11a/b/g/n/ac 1x1 Access Points with SISO standard and can accomplish up to speed of 433.3Mbps with single stream in 802.11ac to connect the wireless LAN. Furthermore AP6256 included SDIO interface for Wi-Fi, UART/ PCM interface for Bluetooth.

In addition, this compact module is a total solution for a combination of Wi-Fi + BT technologies. The module is specifically developed for tablet, OTT box and portable devices.

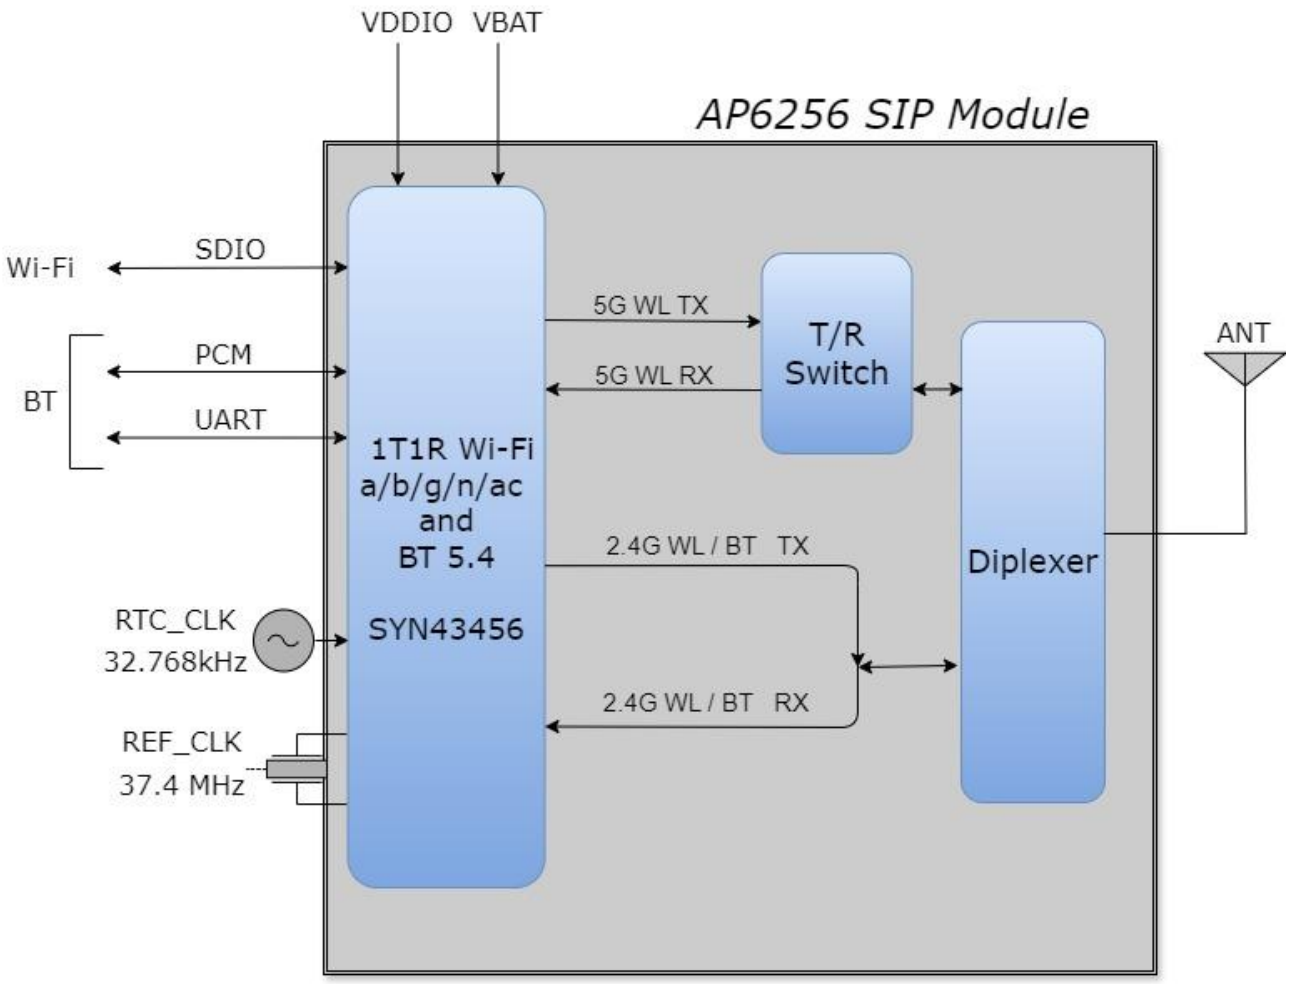

1.2 Product Features

- Lead Free design which is compliant with ROHS requirements.
- TX and RX low-density parity check (LDPC) support for improved range and power efficiency.
- Single-stream spatial multiplexing up to 433.3 Mbps data rate.
- 20, 40, 80 MHz channels with optional SGI (256 QAM modulation)
- Supports 1antenna with one for WLAN & Bluetooth shared port. Also, shared Bluetooth and WLAN receive signal path eliminates the need for an external power splitter while maintaining excellent sensitivity for both Bluetooth and WLAN.
    - Supports standard SDIO v3.0, compatible with SDIO v2.0 HOST interfaces.

- BT host digital interface:
    - HCI UART (up to 4 Mbps)
    - PCM for audio data
- Complies with Bluetooth Core Specification Version 5.4 with provisions for supporting future specifications. With Bluetooth Class 1 or Class2 transmitter operation.
- Supports extended synchronous connections (eSCO), for enhanced voice quality by allowing for retransmission of dropped packets.
- Adaptive frequency hopping (AFH) for reducing radio frequency interference.

A simplified block diagram of the module is depicted in the figure above.

AMPAK Technology Inc.
6F.-2, No. 23, Huanke 1st Rd., Zhubei City, Hsinchu County 302047 , Taiwan
http://www.ampak.com.tw

2. General Specification

2.1 General Specification

Model Name	AP6256
Product Description	1Tx/1Rx 802.11 ac/a/b/g/n Wi-Fi + BT 5.4 Module
Dimension[note 2]	L x W: 12 x 12 (typical) mm，H : 1.67 (Maximum)mm
Wi-Fi Interface	SDIO V3.0/ 2.0
BT Interface	UART / PCM
Operating temperature[note 1]	-30°C to 85°C
Storage temperature	-40°C to 125°C
Humidity	Operating Humidity : 0 to 100% Non-Condensing

Note 1: The optimal RF performance specified in the data sheet, however, is guaranteed only -20 °C to +75 °C and 3.2V < VBAT < 4.4V without derating performance.

Note 2: The Dimension = L x W: 12 x 12(Typ.)mm、H : 1.37 (Max.) mm (without the shielding cover)

2.2 DC Characteristics

2.2.1 Absolute Maximum Ratings

Symbol	Description	Min.	Max.	Unit
VBAT	Input supply Voltage	-0.5	5	V
VDDIO	Digital/Bluetooth/SDIO/ I/O Voltage	-0.5	3.9	V

Extreme caution must be exercised to prevent electrostatic discharge (ESD) damage.

Symbol	Condition	Minimum ESD Rating	Unit
ESD_HAND_HBM	Human body model contact discharge per JEDEC EID/JESD22-A114	1	kV
ESD_HAND_CDM	Charged device model contact discharge per JEDEC EIA/JESD22-C101	250	V

AMPAK Technology Inc.
6F.-2, No. 23, Huanke 1st Rd., Zhubei City, Hsinchu County 302047 , Taiwan
http://www.ampak.com.tw

2.2.2 Recommended Operating Rating

The module requires two power supplies: VBAT and VDDIO.

Voltage rails	Min.	Typ.	Max.	Unit
VBAT note 3	3.0	3.3	4.4	V
VDDIO	1.6	1.8 / 3.3	3.6	V

VBAT current consumption 1A (Peak), when VBAT = 3.3V

Note 3: The optimal RF performance specified in the data sheet, however, is guaranteed only -20 °C to +75 °C and 3.2V < VBAT < 4.4V without derating performance.

The module requires two power supplies: other Digital I/O Pins.

For VDDIO=1.8V	Min.	Max.	Unit
VIL/VIH	0.35×VDDIO	0.65×VDDIO	V
VOL/VOH output@2mA	0.4	VDDIO-0.4	V
For VDDIO=3.3V	**Min.**	**Max.**	**Unit**
VIL/VIH	0.80	2	V
VOL/VOH output@2mA	0.4	VDDIO-0.4	V

AMPAK Technology Inc.
6F.-2, No. 23, Huanke 1st Rd., Zhubei City, Hsinchu County 302047 , Taiwan
http://www.ampak.com.tw

3. Wi-Fi RF Specification

3.1 2.4GHz RF Specification

Conditions : VBAT=3.3V ; VDDIO=3.3V ; Temp:25°C

Feature	Description
WLAN Standard	IEEE 802.11b/g/n & Wi-Fi compliant
Frequency Range	2.400 GHz ~ 2.4835 GHz (2.4GHz ISM Band)
Number of Channels	2.4GHz： Ch1 ~ Ch13
Modulation	802.11b : DQPSK、DBPSK、CCK 802.11 g/n : OFDM /64-QAM、16-QAM、QPSK、BPSK

Output Power , tolerance ± 1.5 dB

The transmit EVM quality & spectrum mask are compliant with IEEE 802.11 standard

802.11b	1Mbps	2Mbps	5.5Mbps	11Mbps	
	17	17	17	17	
802.11g	6、9Mbps	12、18Mbps	24Mbps	36Mbps	48Mbps
	18	17	16	16	15
	54Mbps				
	15				
802.11n 20MHz	MCS0~2	MCS3	MCS4	MCS5	MCS6
	17	17	16	15	14
	MCS7				
	14				

Note： The specifications of RF output power are subject to change to fulfill the safety regulation and requirements in end-user product.

Sensitivity, tolerance ± 2 dB

CCK modulation PER ≦ 8%、OFDM modulation PER ≦ 10%

802.11b	Data Rate	Spec.(dBm)		
	1Mbps	-96		
	2Mbps	-90		
	5.5Mbps	-88		
	11Mbps	-87		
802.11g	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	6Mbps	-91	24Mbps	-83
	9Mbps	-88	36Mbps	-80
	12Mbps	-87	48Mbps	-76

	18Mbps	-85	**54Mbps**	-73
802.11n_20MHz	**Data Rate**	**Spec.(dBm)**	**Data Rate**	**Spec.(dBm)**
	MCS0	-90	**MCS4**	-77
	MCS1	-85	**MCS4**	-75
	MCS2	-84	**MCS6**	-72
	MCS3	-80	**MCS7**	-71
Maximum Input Level	802.11b : -10 dBm			
	802.11g/n : -20 dBm			

AMPAK Technology Inc.
6F.-2, No. 23, Huanke 1st Rd., Zhubei City, Hsinchu County 302047 , Taiwan
http://www.ampak.com.tw

3.2 5GHz RF Specification

Conditions : VBAT=3.3V ; VDDIO=3.3V ; Temp:25°C

Feature	Description
WLAN Standard	IEEE 802.11a/n/ac & Wi-Fi compliant
Frequency Range	5.15~5.35GHz、5.47~5.725GHz、5.725~5.85GHz (5GHz UNII Band)
Number of Channels	5.18~5.35GHz：Ch36 ~ Ch64 5.5~5.72GHz：Ch100 ~ Ch144 5.745~5.825GHz：Ch149 ~ Ch165
Modulation	802.11a : OFDM /64-QAM、16-QAM、QPSK、BPSK 802.11n : OFDM /64-QAM、16-QAM、QPSK、BPSK 802.11ac : OFDM /256-QAM、OFDM /64-QAM、16-QAM、QPSK、BPSK

Output Power , tolerance ± 2 dB

The transmit EVM quality & spectrum mask are compliant with IEEE 802.11 standard

802.11a	**Frequency (MHz)**	**6~9Mbps**	**12~18Mbps**	**24Mbps**	**36Mbps**
	5180~5350	17	17	17	16
	5500~5720	17	17	17	16
	5745~5825	17	17	17	16
	Frequency (MHz)	**48Mbps**	**54Mbps**		
	5180~5350	16	15		
	5500~5720	16	15		
	5745~5825	16	15		
802.11n 20MHz	**Frequency (MHz)**	**MCS0~2**	**MCS3**	**MCS4**	**MCS5**
	5180~5350	17	17	16	16
	5500~5720	17	17	16	16
	5745~5825	17	17	16	16
	Frequency (MHz)	**MCS6**	**MCS7**		
	5180~5350	15	14		
	5500~5720	15	14		
	5745~5825	15	14		
802.11n 40MHz	**Frequency (MHz)**	**MCS0~2**	**MCS3**	**MCS4**	**MCS5**
	5180~5350	17	17	16	16
	5500~5720	17	17	16	16
	5745~5825	17	17	16	16
	Frequency (MHz)	**MCS6**	**MCS7**		

AMPAK Technology Inc.
6F.-2, No. 23, Huanke 1st Rd., Zhubei City, Hsinchu County 302047 , Taiwan
http://www.ampak.com.tw

	5180~5350	15	14		
	5500~5720	15	14		
	5745~5825	15	14		
802.11ac 20MHz	Frequency (MHz)	MCS0~2	MCS3	MCS4	MCS5
	5180~5350	17	17	16	16
	5500~5720	17	17	16	16
	5745~5825	17	17	16	16
	Frequency (MHz)	MCS6	MCS7	MCS8	
	5180~5350	15	14	12	
	5500~5720	15	14	12	
	5745~5825	15	14	12	
802.11ac 40MHz	Frequency (MHz)	MCS0~2	MCS3	MCS4	MCS5
	5180~5350	17	17	16	16
	5500~5720	17	17	16	16
	5745~5825	17	17	16	16
	Frequency (MHz)	MCS6	MCS7	MCS8	MCS9
	5180~5350	15	14	12	10.5
	5500~5720	15	14	12	10.5
	5745~5825	15	14	12	10.5
802.11ac 80MHz	Frequency (MHz)	MCS0~2	MCS3	MCS4	MCS5
	5180~5350	17	17	16	16
	5500~5720	17	17	16	16
	5745~5825	17	17	16	16
	Frequency (MHz)	MCS6	MCS7	MCS8	MCS9
	5180~5350	15	14	12	10.5
	5500~5720	15	14	12	10.5
	5745~5825	15	14	12	10.5

Note：The specifications of RF output power are subject to change to fulfill the safety regulation and requirements in end-user product.

Sensitivity, tolerance ± 2 dB

OFDM modulation PER ≦ 10%

	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
802.11a	6Mbps	-92	24Mbps	-82
	9Mbps	-89	36Mbps	-79
	12Mbps	-88	48Mbps	-75
	18Mbps	-86	54Mbps	-74

802.11n_20MHz	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	MCS0	-91	MCS4	-78
	MCS1	-88	MCS5	-74
	MCS2	-85	MCS6	-73
	MCS3	-82	MCS7	-72
802.11n_40MHz	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	MCS0	-89	MCS4	-76
	MCS1	-85	MCS5	-71
	MCS2	-83	MCS6	-70
	MCS3	-79	MCS7	-68
802.11ac_20MHz	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	MCS0	-90	MCS5	-73
	MCS1	-87	MCS6	-71
	MCS2	-84	MCS7	-70
	MCS3	-81	MCS8	-67
	MCS4	-77		
802.11ac_40MHz	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	MCS0	-88	MCS5	-70
	MCS1	-83	MCS6	-68
	MCS2	-81	MCS7	-66
	MCS3	-78	MCS8	-65
	MCS4	-75	MCS9	-63
802.11ac_80MHz	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	MCS0	-85	MCS5	-69
	MCS1	-82	MCS6	-65
	MCS2	-78	MCS7	-63
	MCS3	-74	MCS8	-61
	MCS4	-71	MCS9	-60
Maximum Input Level	802.11a/n : -20 dBm			
	802.11ac : -30 dBm			

4. Bluetooth Specification

4.1 Bluetooth Specification

Conditions : VBAT=3.3V ; VDDIO=3.3V ; Temp:25°C


Feature	**Description**	
General Specification		
Bluetooth Standard	BDR(1Mbps)、EDR(2、3Mbps)、LE(1Mbps、2Mbps)	
Host Interface	UART	
Frequency Band	2402 MHz ~ 2480 MHz	
Number of Channels	79 channels for classic、40 channels for BLE	
Modulation	GFSK, π/4-DQPSK, 8DPSK	
RF Specification		
	CL1 (dBm)	**CL2** (dBm)
BDR Output Power	6	2
EDR Output Power	4	2
LE Output Power	5	2
	Typical.	
Sensitivity @ BER=0.1% for GFSK (1Mbps)	-88 dBm	
Sensitivity @ BER=0.01% for π/4-DQPSK (2Mbps)	-88 dBm	
Sensitivity @ BER=0.01% for 8DPSK (3Mbps)	-85 dBm	
Sensitivity @ PER=30.8% for LE (1Mbps)	-90 dBm	
Sensitivity @ PER=30.8% for LE (2Mbps)	-90 dBm	
Maximum Input Level	GFSK (1Mbps):-20dBm	
	π/4-DQPSK (2Mbps) :-20dBm	
	8DPSK (3Mbps) :-20dBm	

Note*：The Bluetooth output power is able to be configured by firmware (hcd file).

5. Pin Definition

5.1 Pin Outline

<TOP VIEW>

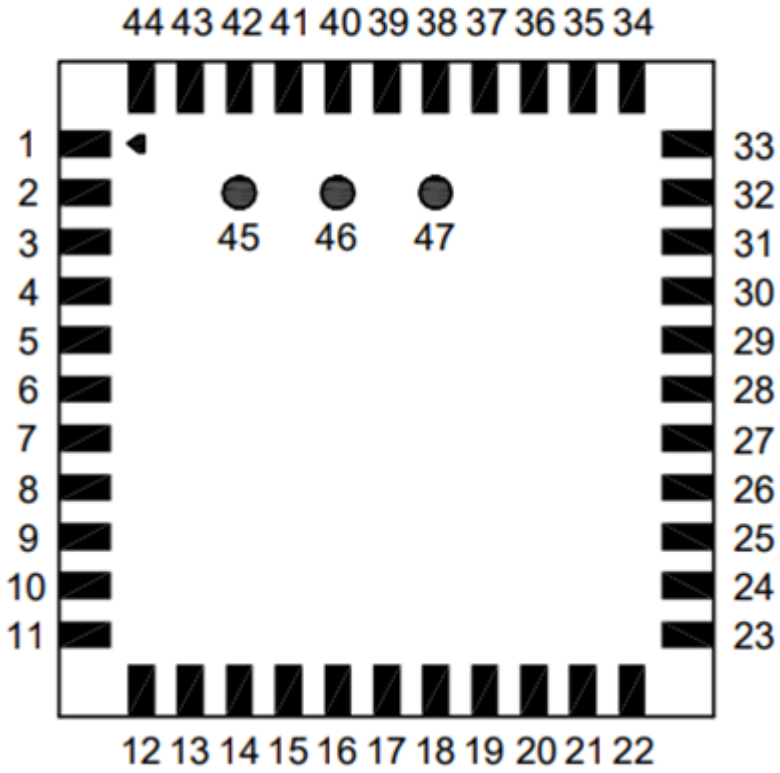

AMPAK Technology Inc.
6F.-2, No. 23, Huanke 1st Rd., Zhubei City, Hsinchu County 302047 , Taiwan
http://www.ampak.com.tw

5.2 Pin Assignment

NO	Name	Type	Description
1	GND	—	Ground connections
2	WL_BT_ANT	I/O	RF I/O port
3	GND	—	Ground connections
4	NC	—	Floating (Don't connected to ground)
5	NC	—	Floating (Don't connected to ground)
6	BT_WAKE	I	HOST wake-up Bluetooth device
7	BT_HOST_WAKE	O	Bluetooth device to wake-up HOST
8	NC	—	Floating (Don't connected to ground)
9	VBAT	P	Main power voltage source input
10	XTAL_IN	I	Crystal input
11	XTAL_OUT	O	Crystal output
12	WL_REG_ON	I	Power up/down internal regulators used by WiFi section
13	WL_HOST_WAKE	O	WLAN to wake-up HOST
14	SDIO_DATA_2	I/O	SDIO data line 2
15	SDIO_DATA_3	I/O	SDIO data line 3
16	SDIO_DATA_CMD	I/O	SDIO command line
17	SDIO_DATA_CLK	I/O	SDIO clock line
18	SDIO_DATA_0	I/O	SDIO data line 0
19	SDIO_DATA_1	I/O	SDIO data line 1
20	GND	—	Ground connections
21	VIN_LDO_OUT	P	Internal Buck voltage generation pin
22	VDDIO	P	I/O Voltage supply input
23	VIN_LDO	P	Internal Buck voltage generation pin
24	LPO	I	External Low Power Clock input (32.768KHz)
25	PCM_OUT	O	PCM Data output
26	PCM_CLK	I/O	PCM clock
27	PCM_IN	I	PCM data input
28	PCM_SYNC	I/O	PCM sync signal
29	SDIO_VSEL	I	SDIO mode selection pin NC when VDDIO 1.8V Pull-down with 10K Ohm when VDDIO 3.3V
30	NC	—	Floating (Don't connected to ground)
31	GND	—	Ground connections


AMPAK Technology Inc.
6F.-2, No. 23, Huanke 1st Rd., Zhubei City, Hsinchu County 302047 , Taiwan
http://www.ampak.com.tw

32	NC	—	Floating (Don’t connected to ground)
33	GND	—	Ground connections
34	BT_REG_ON	I	Power up/down internal regulators used by BT section
35	NC	—	Floating (Don’t connected to ground)
36	GND	—	Ground connections
37	GPIO_6	I/O	GPIO configuration pin
38	GPIO_3	I/O	GPIO configuration pin
39	GPIO_5	I/O	GPIO configuration pin
40	GPIO_2	I/O	GPIO configuration pin
41	UART_RTS_N	O	Bluetooth UART interface
42	UART_TXD	O	Bluetooth UART interface
43	UART_RXD	I	Bluetooth UART interface
44	UART_CTS_N	I	Bluetooth UART interface
45	TP1(NC)	—	Floating (Don’t connected to ground)
46	TP2(NC)	—	Floating (Don’t connected to ground)
47	TP3(NC)	—	Floating (Don’t connected to ground)

AMPAK Technology Inc.
6F.-2, No. 23, Huanke 1st Rd., Zhubei City, Hsinchu County 302047 , Taiwan
http://www.ampak.com.tw

6. Dimensions


6.1 Module Dimensions

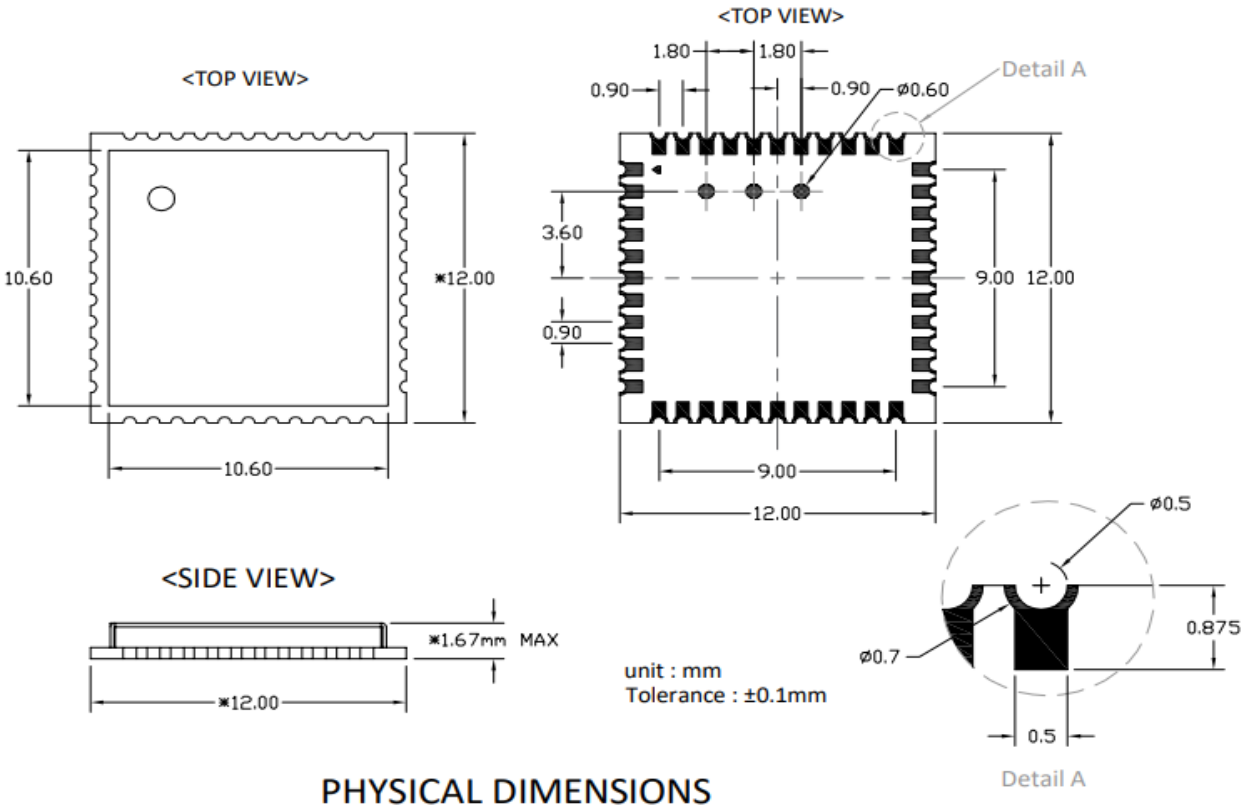


PHYSICAL DIMENSIONS

AMPAK Technology Inc.
6F.-2, No. 23, Huanke 1st Rd., Zhubei City, Hsinchu County 302047 , Taiwan
http://www.ampak.com.tw

6.2 Recommended Footprint

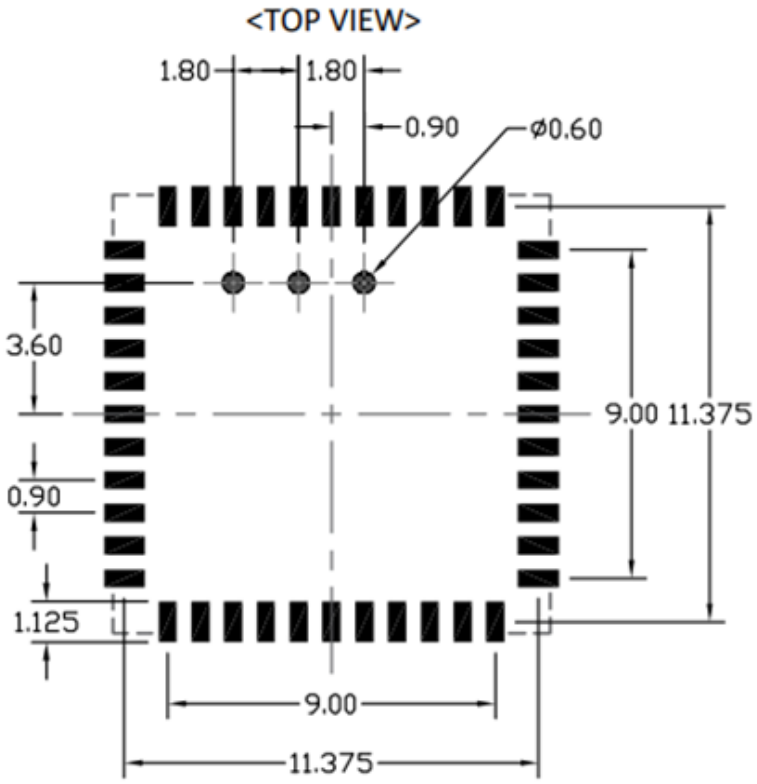

- Solder paste layer design is generally the same as recommended footprint.
  (錫膏層設計通常建議和焊墊尺寸相同)
- If soldering quality with good wetting on upright side is essential for PQC, how to optimize the aperture design in the stencil to adjust the amount of solder paste would be crucial.
  In addition, a kind of stencil design with stepped thickness in partial area would be considered if the thickness of stencil is about 0.1mm or thinner. Please optimize the stencil design by manufacture engineer or contact AMPAK FAE for assistance.
  (如果模組吃錫品質考量側面爬錫，如何優化鋼網開孔設計以調整適當的錫膏量是非常重要的。尤其鋼網的厚度大約是 0.1mm 或更薄時，可考慮局部加厚鋼網的設計。請諮詢製程工程師以優化鋼網的設計,或是聯絡正基科技技術支持團隊).

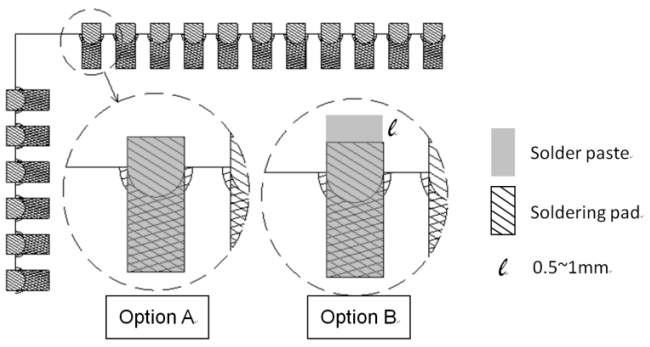

AMPAK Technology Inc.
6F.-2, No. 23, Huanke 1st Rd., Zhubei City, Hsinchu County 302047 , Taiwan
http://www.ampak.com.tw

7. External clock reference

External LPO signal characteristics

Parameter	Specification	Units
Nominal input frequency	32.768	kHz
Frequency accuracy	+/-30	ppm
Duty cycle	30 - 70	%
Input signal amplitude	400 to 3300	mV, p-p
Signal type	Square-wave or sine-wave	-
Input impedance	>100k <5	Ω pF
Clock jitter (integrated over 300Hz – 15KHz)	<1	Hz
Output high voltage	0.7Vio - Vio	V

Input signal amplitude follow VDDIO (1.8V or 3.3V)

External 37.4MHz X'TAL characteristics

Parameter	Specification	Units
Nominal frequency - F0	37.4	MHz
Frequency Tolerance - △F / F 0 (At 25℃ +/- 3℃)	+/- 10	ppm
Operation Temperature Range - Topr	-30 ~ + 85	℃
Freq. Stability(over operating temperature) - TC Ref. to 25℃	+/- 10	ppm
Load capacitance - CL	18	pF
Equivalent Series Resistance – ESR	Max. 60	Ω
Drive Level - DL	Typ. 50, Max. 100	uW
Insulation resistance – IR At 100Vdc	Min. 500	MΩ


AMPAK Technology Inc.
6F.-2, No. 23, Huanke 1st Rd., Zhubei City, Hsinchu County 302047 , Taiwan
http://www.ampak.com.tw

8. Host Interface Timing Diagram


8.1 Power-up Sequence Timing Diagram

The module has signals that allow the host to control power consumption by enabling or disabling the Bluetooth, WLAN and internal regulator blocks. These signals are described below.
Additionally, diagrams are provided to indicate proper sequencing of the signals for carious operating states. The timing value indicated are minimum required values: longer delays are also acceptable.


- WL_REG_ON: Used by the PMU to power up or power down the internal regulators used by the WLAN section. When this pin is high, the regulators are enabled and the WLAN section is out of reset. When this pin is low the WLAN section is in reset.
- BT_REG_ON: Used by the PMU to power up or power down the internal regulators used by the BT section. Low asserting reset for Bluetooth. This pin has no effect on WLAN and does not control any PMU functions. This pin must be driven high or low (not left floating).

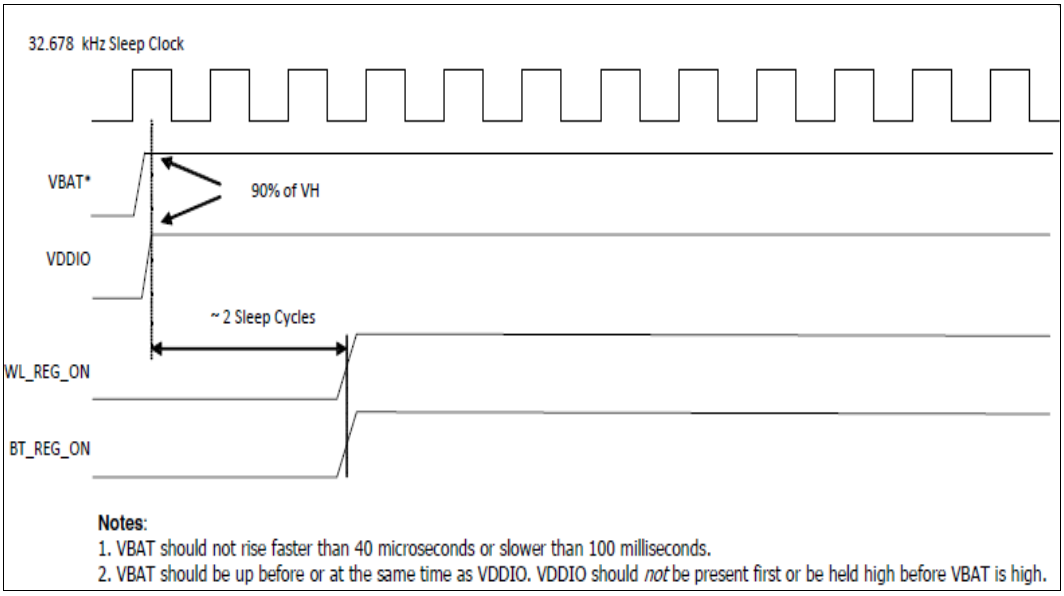


WLAN=ON, Bluetooth=ON

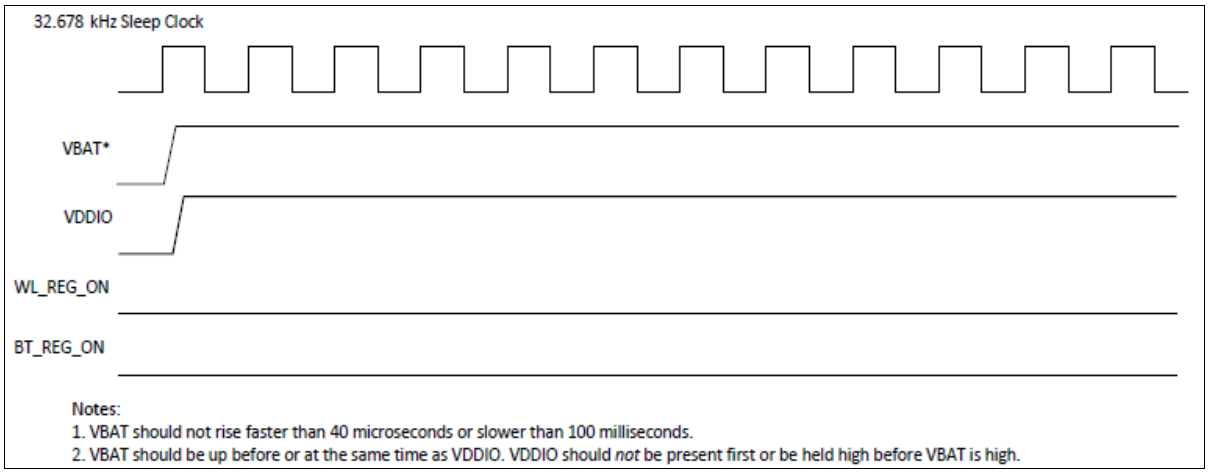

WLAN=OFF, Bluetooth=OFF

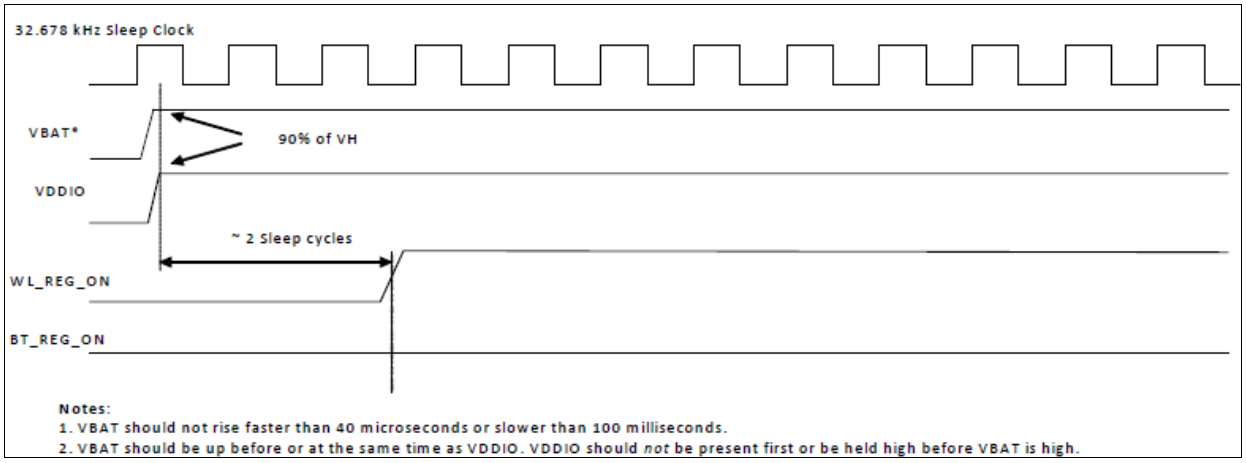

WLAN=ON, Bluetooth=OFF

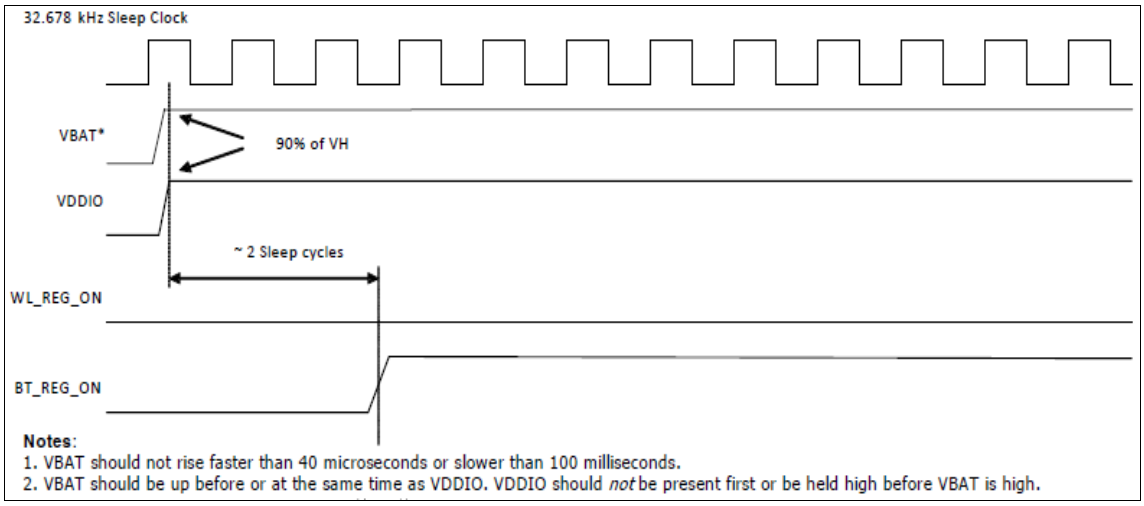

WLAN=OFF, Bluetooth=ON

AMPAK Technology Inc.
6F.-2, No. 23, Huanke 1st Rd., Zhubei City, Hsinchu County 302047 , Taiwan
http://www.ampak.com.tw

8.2 SDIO Interface Description

The module supports SDIO version 3.0 for all 1.8V 4-bit UHSI speeds: SDR50(100 MHz),SDR104(208MHz) and DDR50(50MHz, dual rates) in addition to the 3.3V default speed(25MHz) and high speed (50 MHz). It has the ability to stop the SDIO clock and map the interrupt signal into a GPIO pin. This 'out-of-band' interrupt signal notifies the host when the WLAN device wants to turn on the SDIO interface. The ability to force the control of the gated clocks from within the WLAN chip is also provided.


- Function 0 Standard SDIO function (Max Block Size / Byte Count = 32B)
- Function 1 Backplane Function to access the internal System On Chip (SOC) address space (Max Block Size / Byte Count = 64B)
- Function 2 WLAN Function for efficient WLAN packet transfer through DMA (Max Block Size/Byte Count=512B)

SDIO Pin Description

SD 4-Bit Mode	
DATA0	Data Line 0
DATA1	Data Line 1 or Interrupt
DATA2	Data Line 2 or Read Wait
DATA3	Data Line 3
CLK	Clock
CMD	Command Line

AMPAK Technology Inc.
6F.-2, No. 23, Huanke 1st Rd., Zhubei City, Hsinchu County 302047 , Taiwan
http://www.ampak.com.tw

SDIO Default Mode Timing Diagram

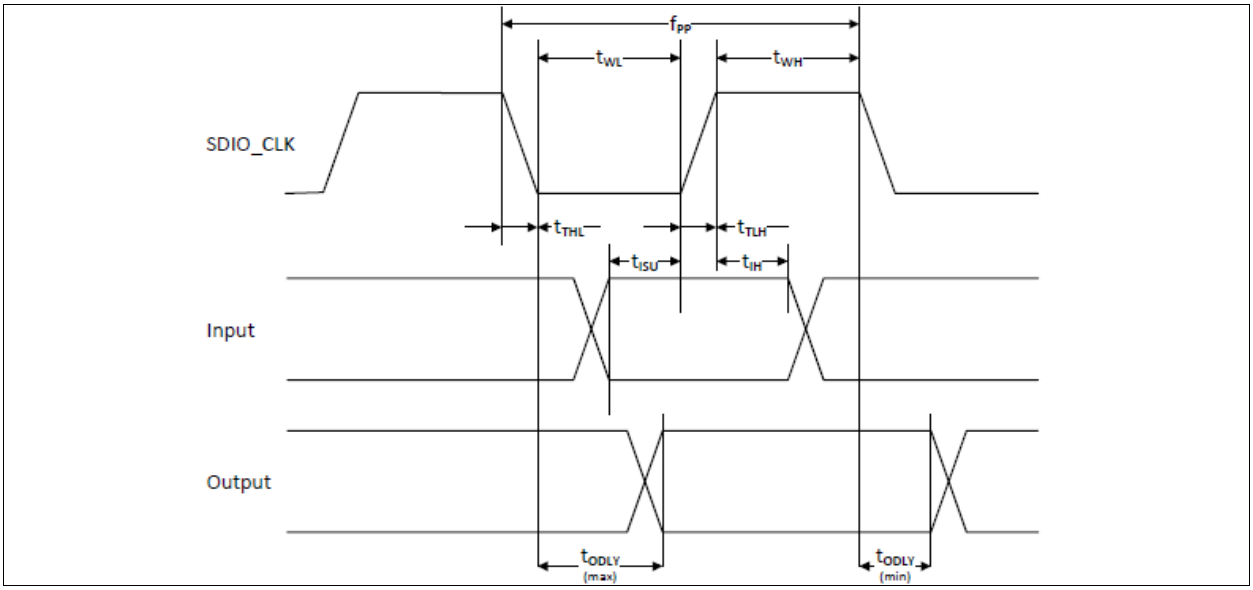


Parameter	*Symbol*	*Minimum*	*Typical*	*Maximum*	*Unit*
SDIO CLK (All values are referred to minimum VIH and maximum VIL[b])					
Frequency – Data Transfer mode	fPP	0	–	25	MHz
Frequency – Identification mode	fOD	0	–	400	kHz
Clock low time	tWL	10	–	–	ns
Clock high time	tWH	10	–	–	ns
Clock rise time	tTLH	–	–	10	ns
Clock low time	tTHL	–	–	10	ns
Inputs: CMD, DAT (referenced to CLK)					
Input setup time	tISU	5	–	–	ns
Input hold time	tIH	5	–	–	ns
Outputs: CMD, DAT (referenced to CLK)					
Output delay time – Data Transfer mode	tODLY	0	–	14	ns
Output delay time – Identification mode	tODLY	0	–	50	ns

a. Timing is based on CL ≤ 40pF load on CMD and Data.
b. min(Vih) = 0.7 × VDDIO and max(Vil) = 0.2 × VDDIO.

AMPAK Technology Inc.
6F.-2, No. 23, Huanke 1st Rd., Zhubei City, Hsinchu County 302047 , Taiwan
http://www.ampak.com.tw

SDIO High Speed Mode Timing Diagram

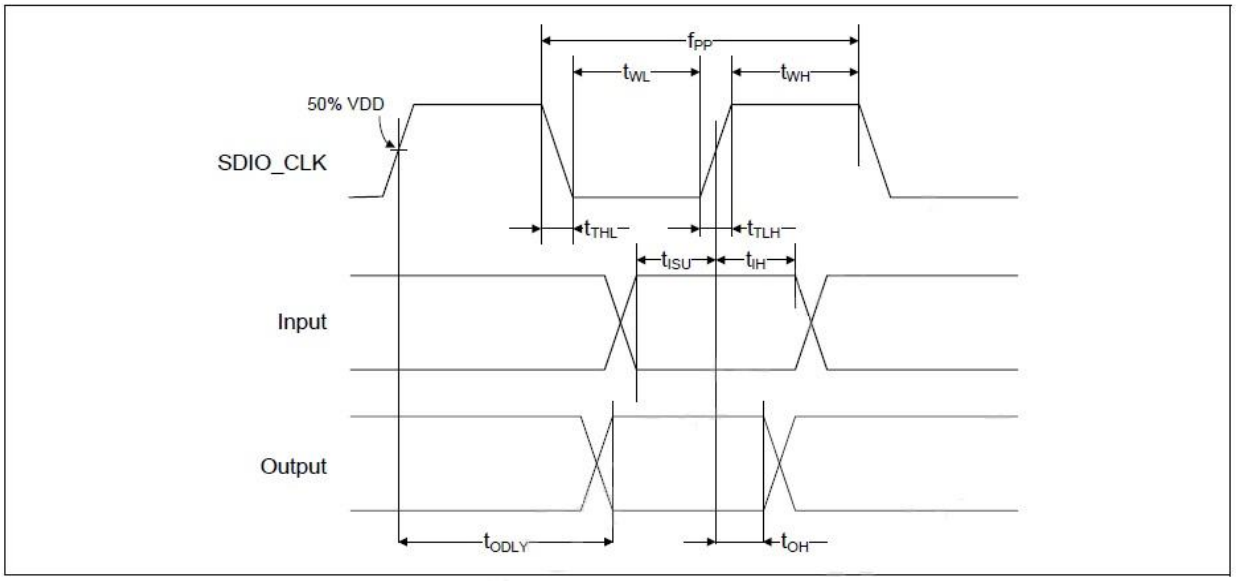


Parameter	*Symbol*	*Minimum*	*Typical*	*Maximum*	*Unit*
SDIO CLK (all values are referred to minimum VIH and maximum VIL[b])					
Frequency – Data Transfer Mode	fPP	0	–	50	MHz
Frequency – Identification Mode	fOD	0	–	400	kHz
Clock low time	tWL	7	–	–	ns
Clock high time	tWH	7	–	–	ns
Clock rise time	tTLH	–	–	3	ns
Clock low time	tTHL	–	–	3	ns
Inputs: CMD, DAT (referenced to CLK)					
Input setup Time	tISU	6	–	–	ns
Input hold Time	tIH	2	–	–	ns
Outputs: CMD, DAT (referenced to CLK)					
Output delay time – Data Transfer Mode	tODLY	–	–	14	ns
Output hold time	tOH	2.5	–	–	ns
Total system capacitance (each line)	CL	–	–	40	pF

a. Timing is based on CL ≤ 40 pF load on CMD and Data.
b. min(Vih) = 0.7 × VDDIO and max(Vil) = 0.2 × VDDIO.

AMPAK Technology Inc.
6F.-2, No. 23, Huanke 1st Rd., Zhubei City, Hsinchu County 302047 , Taiwan
http://www.ampak.com.tw


SDIO Bus Timing Specifications in SDR Modes

Clock timing (SDR Modes)

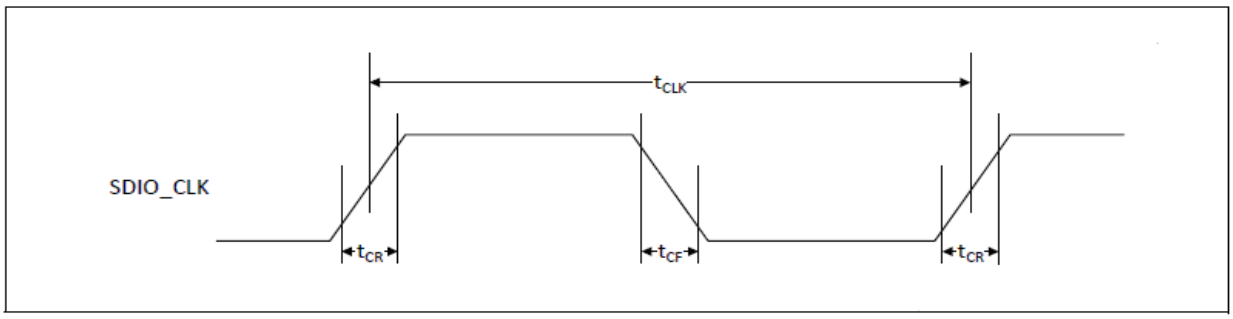

Parameter	Symbol	Minimum	Maximum	Unit	Comments
–	t_{CLK}	40	–	ns	SDR12 mode
		20	–	ns	SDR25 mode
		10	–	ns	SDR50 mode
		4.8	–	ns	SDR104 mode
–	t_{CR}, t_{CF}	–	0.2 × t_{CLK}	ns	t_{CR}, t_{CF} < 2.00 ns (max) @100 MHz, C_{CARD} = 10 pF t_{CR}, t_{CF} < 0.96 ns (max) @208 MHz, C_{CARD} = 10 pF
Clock duty	–	30	70	%	–


SDIO Bus Input timing (SDR Modes)

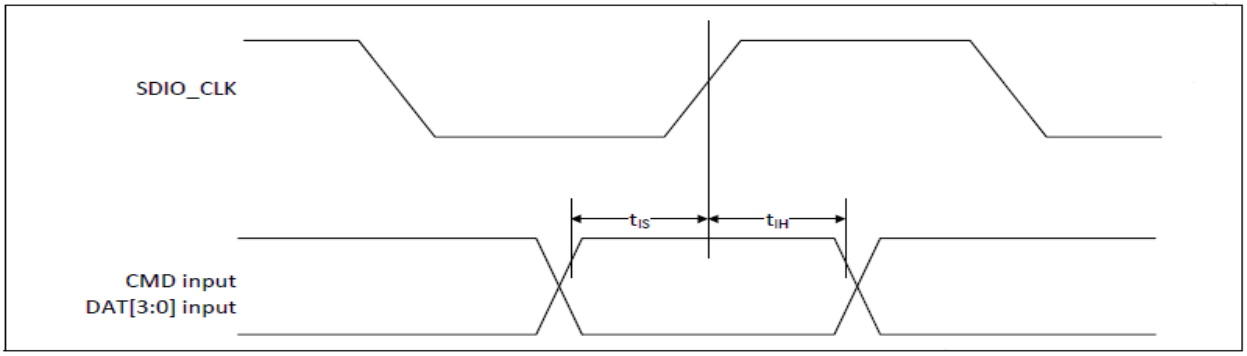

Symbol	Minimum	Maximum	Unit	Comments
SDR104 Mode				
t_{IS}	1.4	–	ns	C_{CARD} = 10 pF, VCT = 0.975V
t_{IH}	0.80	–	ns	C_{CARD} = 5 pF, VCT = 0.975V
SDR50 Mode				
t_{IS}	3.00	–	ns	C_{CARD} = 10 pF, VCT = 0.975V
t_{IH}	0.80	–	ns	C_{CARD} = 5 pF, VCT = 0.975V


AMPAK Technology Inc.
6F.-2, No. 23, Huanke 1st Rd., Zhubei City, Hsinchu County 302047 , Taiwan
http://www.ampak.com.tw

SDIO Bus output timing (SDR Modes up to 100MHz)

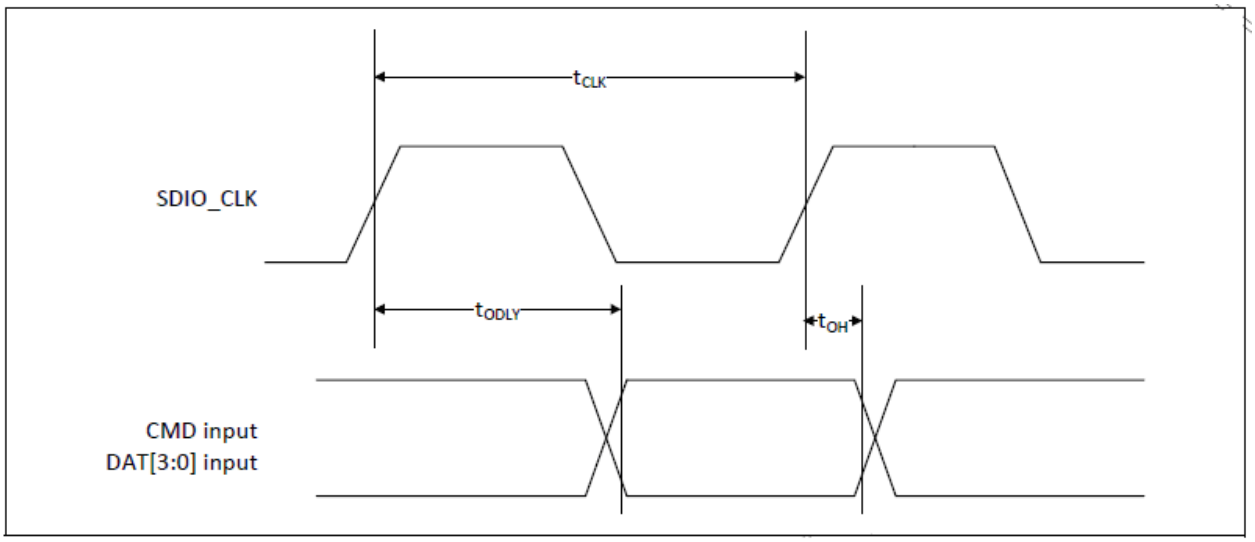

Symbol	Minimum	Maximum	Unit	Comments
t_{ODLY}	–	7.5	ns	t_{CLK} ≥ 10 ns C_L = 30 pF using driver type B for SDR50
t_{ODLY}	–	14.0	ns	t_{CLK} ≥ 20 ns C_L = 40 pF using for SDR12, SDR25
t_{OH}	1.5	–	ns	Hold time at the t_{ODLY} (min) C_L = 15 pF


Card output timing (SDR Modes 100MHz to 208MHz)

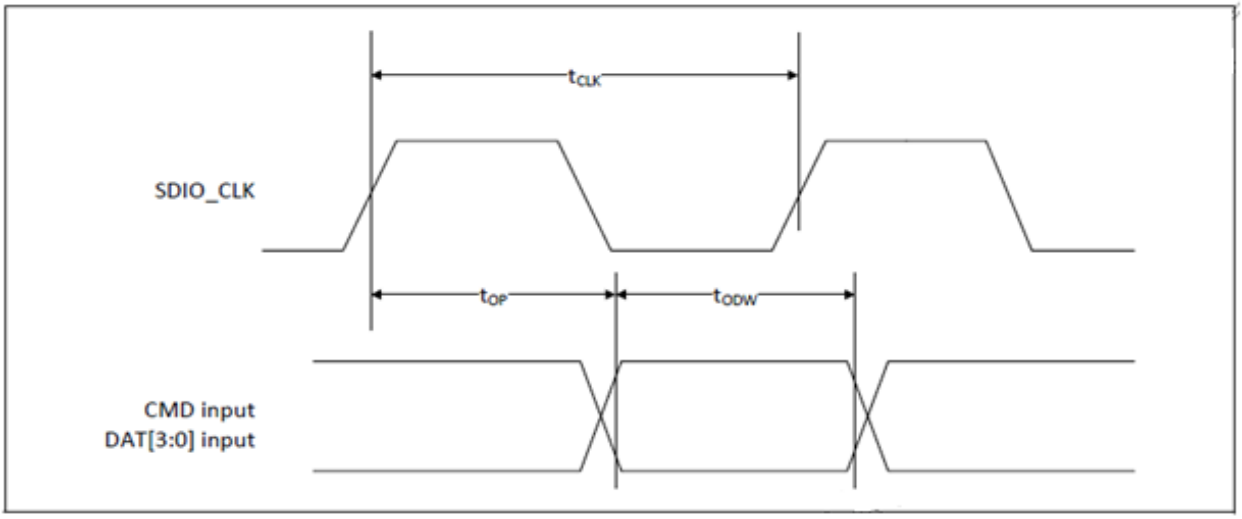

Symbol	Minimum	Maximum	Unit	Comments
t_{OP}	0	2	UI	Card output phase
Δt_{OP}	–350	+1550	ps	Delay variation due to temp change after tuning
t_{ODW}	0.60	–	UI	t_{ODW}=2.88 ns @208 MHz


- Δt_{OP} = +1550 ps for junction temperature of Δt_{OP} = 90 degrees during operation
- Δt_{OP} = –350 ps for junction temperature of Δt_{OP} = –20 degrees during operation
- Δt_{OP} = +2600 ps for junction temperature of Δt_{OP} = –20 to +125 degrees during operation

Δt_{OP} Consideration for Variable Data Window (SDR 104 Mode)

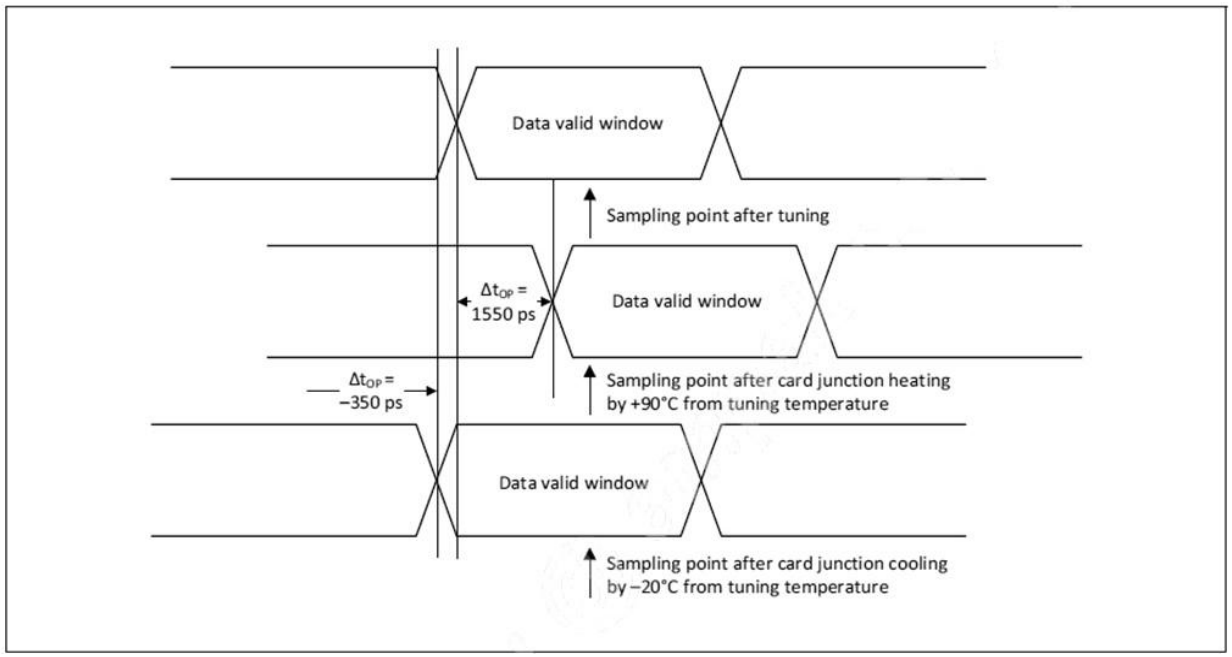


AMPAK Technology Inc.
6F.-2, No. 23, Huanke 1st Rd., Zhubei City, Hsinchu County 302047 , Taiwan
http://www.ampak.com.tw

SDIO Bus Timing Specifications in DDR50 Mode

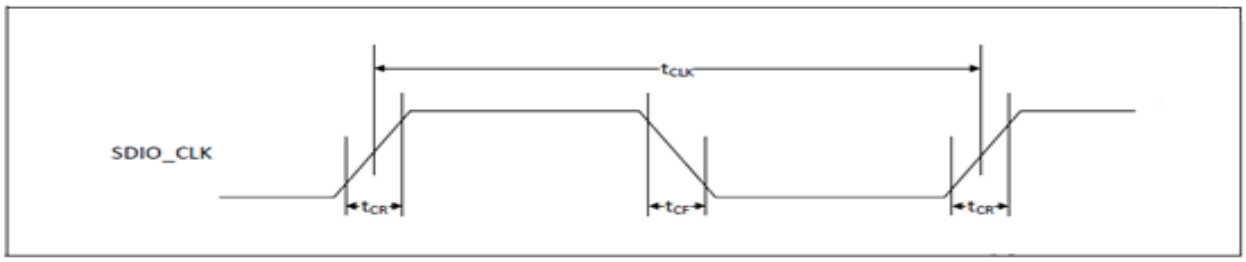

Parameter	Symbol	Minimum	Maximum	Unit	Comments
–	t_{CLK}	20	–	ns	DDR50 mode
–	t_{CR},t_{CF}	–	0.2 × tCLK	ns	t_{CR}, t_{CF} < 4.00 ns (max) @50 MHz, C_{CARD} = 10 pF
Clock duty	–	45	55	%	–

Data Timing

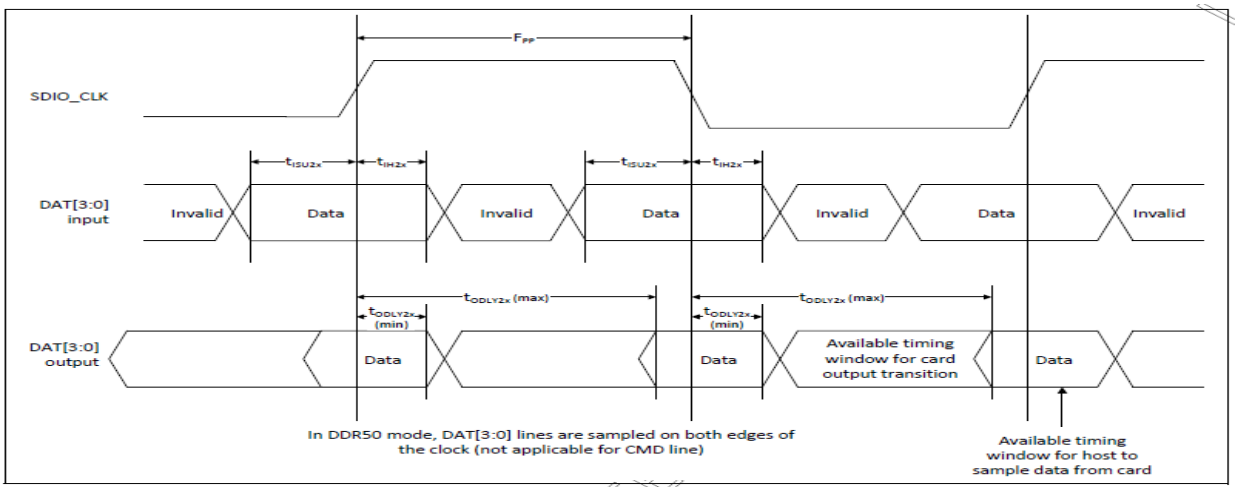

Parameter	Symbol	Minimum	Maximum	Unit	Comments
Input CMD					
Input setup time	t_{ISU}	6	–	ns	C_{CARD} < 10 pF (1 Card)
Input hold time	t_{IH}	0.8	–	ns	C_{CARD} < 10 pF (1 Card)
Output CMD					
Output delay time	t_{ODLY}	–	13.7	ns	C_{CARD} < 30 pF (1 Card)
Output hold time	t_{OH}	1.5	–	ns	C_{CARD} < 15 pF (1 Card)
Input DAT					
Input setup time	t_{ISU2x}	3	–	ns	C_{CARD} < 10 pF (1 Card)
Input hold time	t_{IH2x}	0.8	–	ns	C_{CARD} < 10 pF (1 Card)
Output DAT					
Output delay time	t_{ODLY2x}	–	7.5	ns	C_{CARD} < 25 pF (1 Card)
Output hold time	t_{ODLY2x}	1.5	–	ns	C_{CARD} < 15 pF (1 Card)


AMPAK Technology Inc.
6F.-2, No. 23, Huanke 1st Rd., Zhubei City, Hsinchu County 302047 , Taiwan
http://www.ampak.com.tw

8.3 PCM Interface Description

The PCM Interface on the AP6256 can connect to linear PCM Codec devices in master or slave mode. In master mode, the AP6256 generates the PCM_CLK and PCM_SYNC signals, and in slave mode, these signals are provided by another master on the PCM interface and are inputs to the AP6256.The configuration of the PCM interface may be adjusted by the host through the use of vendor-specific HCI commands.

Short Frame Sync, Master Modem

PCM Timing Diagram (Short Frame Sync, Master Mode)

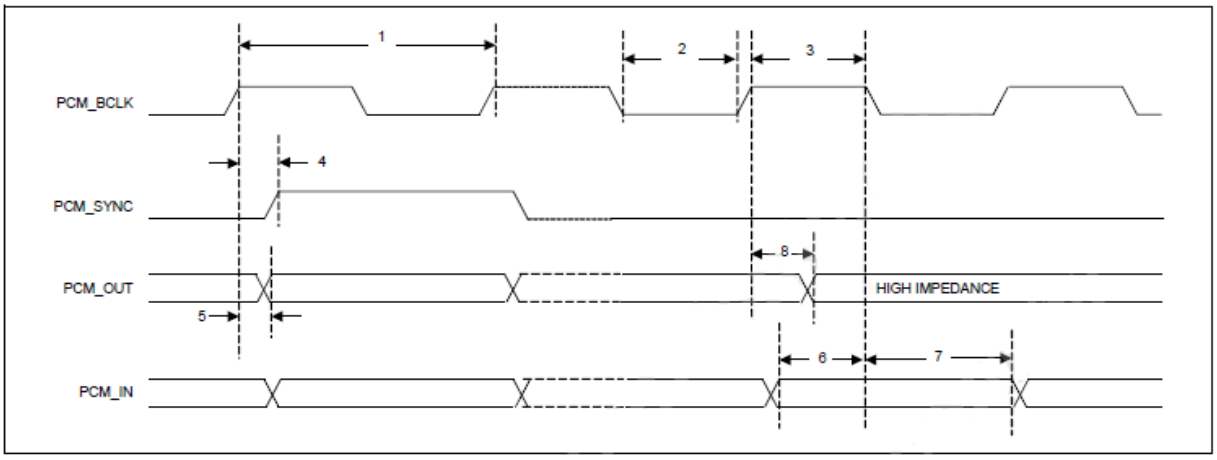


PCM Interface Timing Specifications (Short Frame Sync, Master Mode)

Reference	Characteristics	Minimum	Typical	Maximum	Unit
1	PCM bit clock frequency		–	12	MHz
2	PCM bit clock low	41	–	–	ns
3	PCM bit clock high	41	–	–	ns
4	PCM_SYNC delay	0	–	25	ns
5	PCM_OUT delay	0	–	25	ns
6	PCM_IN setup	8	–	–	ns
7	PCM_IN hold	8	–	–	ns
8	Delay from rising edge of PCM_BCLK during last bit period to PCM_OUT becoming high impedance	0	–	25	ns

AMPAK Technology Inc.
6F.-2, No. 23, Huanke 1st Rd., Zhubei City, Hsinchu County 302047 , Taiwan
http://www.ampak.com.tw

Short Frame Sync, Slave Mode

PCM Timing Diagram (Short Frame Sync, Slave Mode)

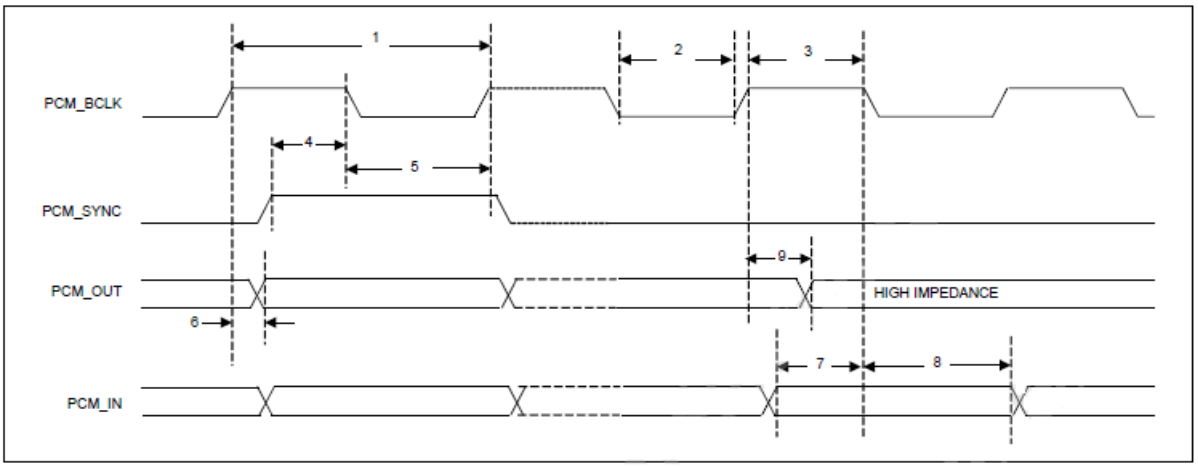


PCM Interface Timing Specifications (Short Frame Sync, Slave Mode)

Reference	Characteristics	Minimum	Typical	Maximum	Unit
1	PCM bit clock frequency	–	–	12	MHz
2	PCM bit clock low	41	–	–	ns
3	PCM bit clock high	41	–	–	ns
4	PCM_SYNC setup	8	–	–	ns
5	PCM_SYNC hold	8	–	–	ns
6	PCM_OUT delay	0	–	25	ns
7	PCM_IN setup	8	–	–	ns
8	PCM_IN hold	8	–	–	ns
9	Delay from rising edge of PCM_BCLK during last bit period to PCM_OUT becoming high impedance	0	–	25	ns

AMPAK Technology Inc.
6F.-2, No. 23, Huanke 1st Rd., Zhubei City, Hsinchu County 302047 , Taiwan
http://www.ampak.com.tw

Long Frame Sync, Master Mode

PCM Timing Diagram (Long Frame Sync, Master Mode)

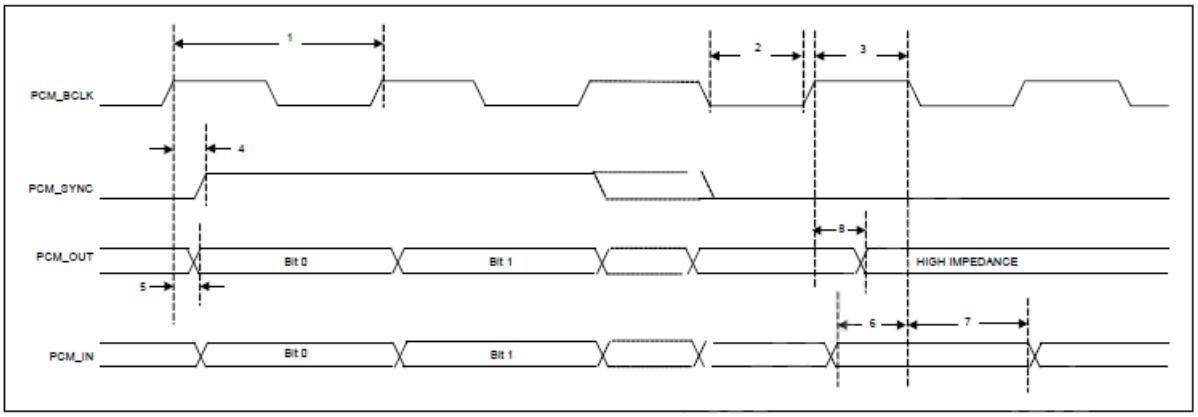


PCM Interface Timing Specifications (Long Frame Sync, Master Mode)

Reference	Characteristics	Minimum	Typical	Maximum	Unit
1	PCM bit clock frequency	–	–	12	MHz
2	PCM bit clock low	41	–	–	ns
3	PCM bit clock high	41	–	–	ns
4	PCM_SYNC delay	0	–	25	ns
5	PCM_OUT delay	0	–	25	ns
6	PCM_IN setup	8	–	–	ns
7	PCM_IN hold	8	–	–	ns
8	Delay from rising edge of PCM_BCLK during last bit period to PCM_OUT becoming high impedance	0	–	25	ns

AMPAK Technology Inc.
6F.-2, No. 23, Huanke 1st Rd., Zhubei City, Hsinchu County 302047 , Taiwan
http://www.ampak.com.tw

Long Frame Sync, Slave Mode

PCM Timing Diagram (Long Frame Sync, Slave Mode)

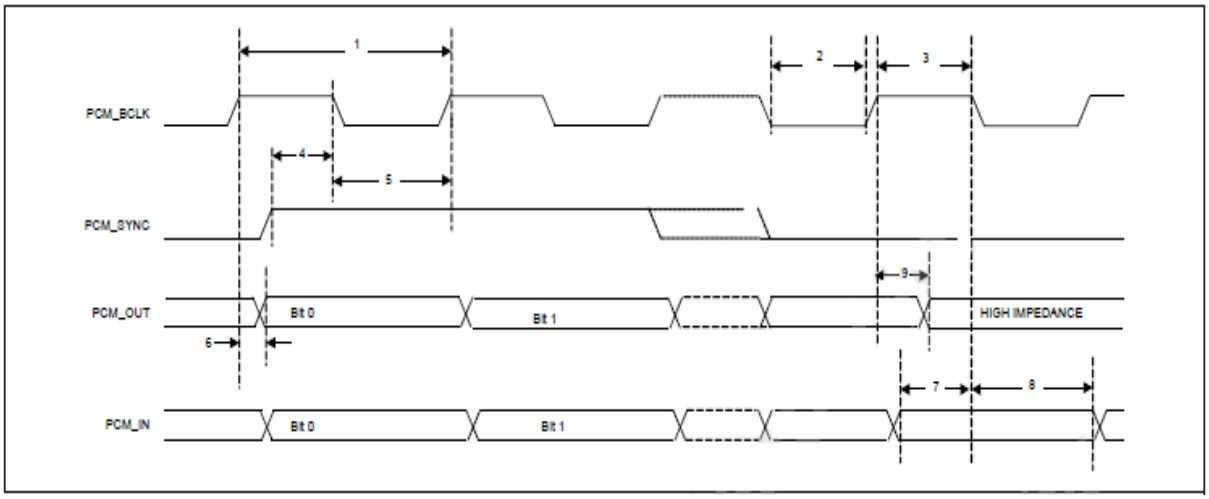


PCM Interface Timing Specifications (Long Frame Sync, Slave Mode)

Reference	*Characteristics*	*Minimum*	*Typical*	*Maximum*	*Unit*
1	PCM bit clock frequency	–	–	12	MHz
2	PCM bit clock low	41	–	–	ns
3	PCM bit clock high	41	–	–	ns
4	PCM_SYNC setup	8	–	–	ns
5	PCM_SYNC hold	8	–	–	ns
6	PCM_OUT delay	0	–	25	ns
7	PCM_IN setup	8	–	–	ns
8	PCM_IN hold	8	–	–	ns
9	Delay from rising edge of PCM_BCLK during last bit period to PCM_OUT becoming high impedance	0	–	25	ns

AMPAK Technology Inc.
6F.-2, No. 23, Huanke 1st Rd., Zhubei City, Hsinchu County 302047 , Taiwan
http://www.ampak.com.tw

Short Frame Sync, Burst Mode

PCM Burst Mode Timing (Receive Only, Short Frame Sync)

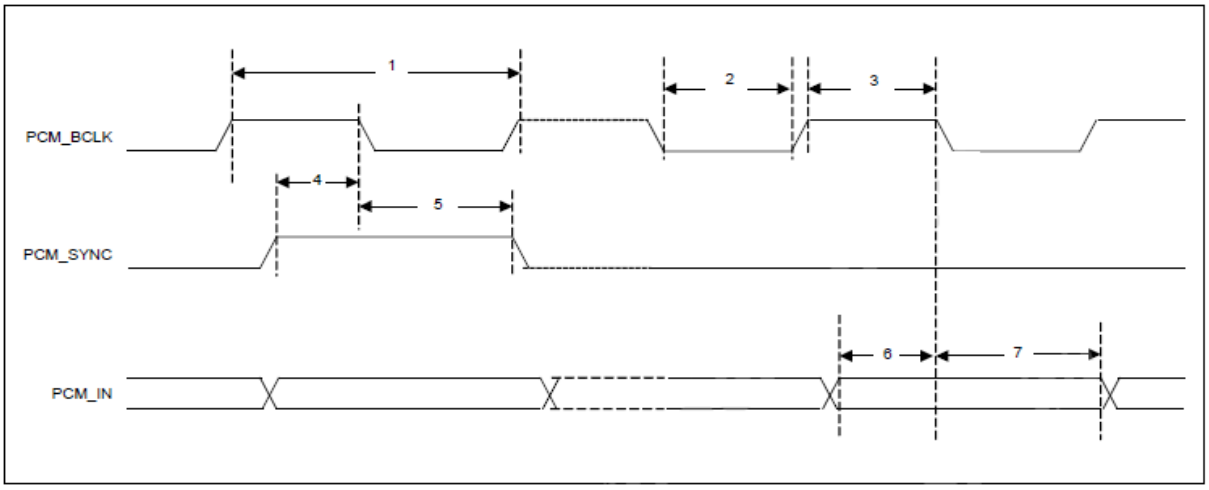


PCM Burst Mode (Receive Only, Short Frame Sync)

Reference	Characteristics	Minimum	Typical	Maximum	Unit
1	PCM bit clock frequency	–	–	24	MHz
2	PCM bit clock low	20.8	–	–	ns
3	PCM bit clock high	20.8	–	–	ns
4	PCM_SYNC setup	8	–	–	ns
5	PCM_SYNC hold	8	–	–	ns
6	PCM_IN setup	8	–	–	ns
7	PCM_IN hold	8	–	–	ns

AMPAK Technology Inc.
6F.-2, No. 23, Huanke 1st Rd., Zhubei City, Hsinchu County 302047 , Taiwan
http://www.ampak.com.tw

Long Frame Sync, Burst Mode

PCM Burst Mode Timing (Receive Only, Long Frame Sync)

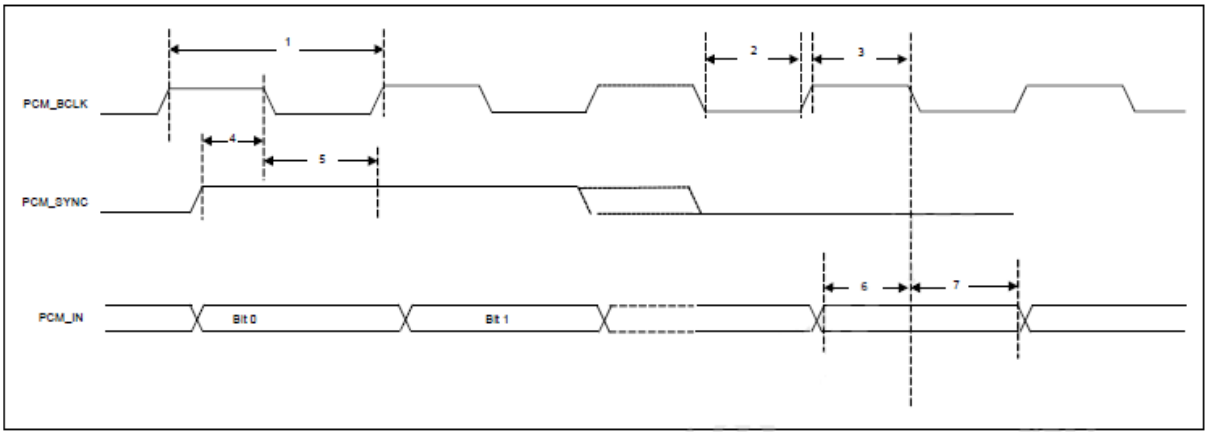

PCM Burst Mode (Receive Only, Long Frame Sync)

Reference	Characteristics	Minimum	Typical	Maximum	Unit
1	PCM bit clock frequency	–	–	24	MHz
2	PCM bit clock low	20.8	–	–	ns
3	PCM bit clock high	20.8	–	–	ns
4	PCM_SYNC setup	8	–	–	ns
5	PCM_SYNC hold	8	–	–	ns
6	PCM_IN setup	8	–	–	ns
7	PCM_IN hold	8	–	–	ns

AMPAK Technology Inc.
6F.-2, No. 23, Huanke 1st Rd., Zhubei City, Hsinchu County 302047 , Taiwan
http://www.ampak.com.tw

8.4 UART Interface Description

The UART is a standard 4-wire interface (RX, TX, RTS, and CTS) with adjustable baud rates from 9600 bps to 4.0 Mbps. The interface features an automatic baud rate detection capability that returns a baud rate selection. Alternatively, the baud rate may be selected through a vendor-specific UART HCI command.

UART has a 1040-byte receive FIFO and a 1040-byte transmit FIFO to support EDR. Access to the FIFOs is conducted through the AHB interface through either DMA or the CPU. The UART supports the Bluetooth UART HCI specification: H4, a custom Extended H4, and H5. The default baud rate is 115.2 Kbaud.

The UART supports the 3-wire H5 UART transport, as described in the Bluetooth specification (Three-wire UART Transport Layer). Compared to H4, the H5 UART transport reduces the number of signal lines required by eliminating the CTS and RTS signals.

The AP6256 UART can perform XON/XOFF flow control and includes hardware support for the Serial Line Input Protocol (SLIP). It can also perform wake-on activity. For example, activity on the RX or CTS inputs can wake the chip from a sleep state.


Normally, the UART baud rate is set by a configuration record downloaded after device reset, or by automatic baud rate detection, and the host does not need to adjust the baud rate. Support for changing the baud rate during normal HCI UART operation is included through a vendor-specific command that allows the host to adjust the contents of the baud rate registers. The AP6256 UARTs operate correctly with the host UART as long as the combined baud rate error of the two devices is within ±2%.

AMPAK Technology Inc.
6F.-2, No. 23, Huanke 1st Rd., Zhubei City, Hsinchu County 302047 , Taiwan
http://www.ampak.com.tw

Example of Common Baud Rates

Desired Rate	Actual Rate	Error (%)
4000000	4000000	0.00
3692000	3692308	0.01
3000000	3000000	0.00
2000000	2000000	0.00
1500000	1500000	0.00
1444444	1454544	0.70
921600	923077	0.16
460800	461538	0.16
230400	230796	0.17
115200	115385	0.16
57600	57692	0.16
38400	38400	0.00
28800	28846	0.16
19200	19200	0.00
14400	14423	0.16
9600	9600	0.00


Startup signaling sequence

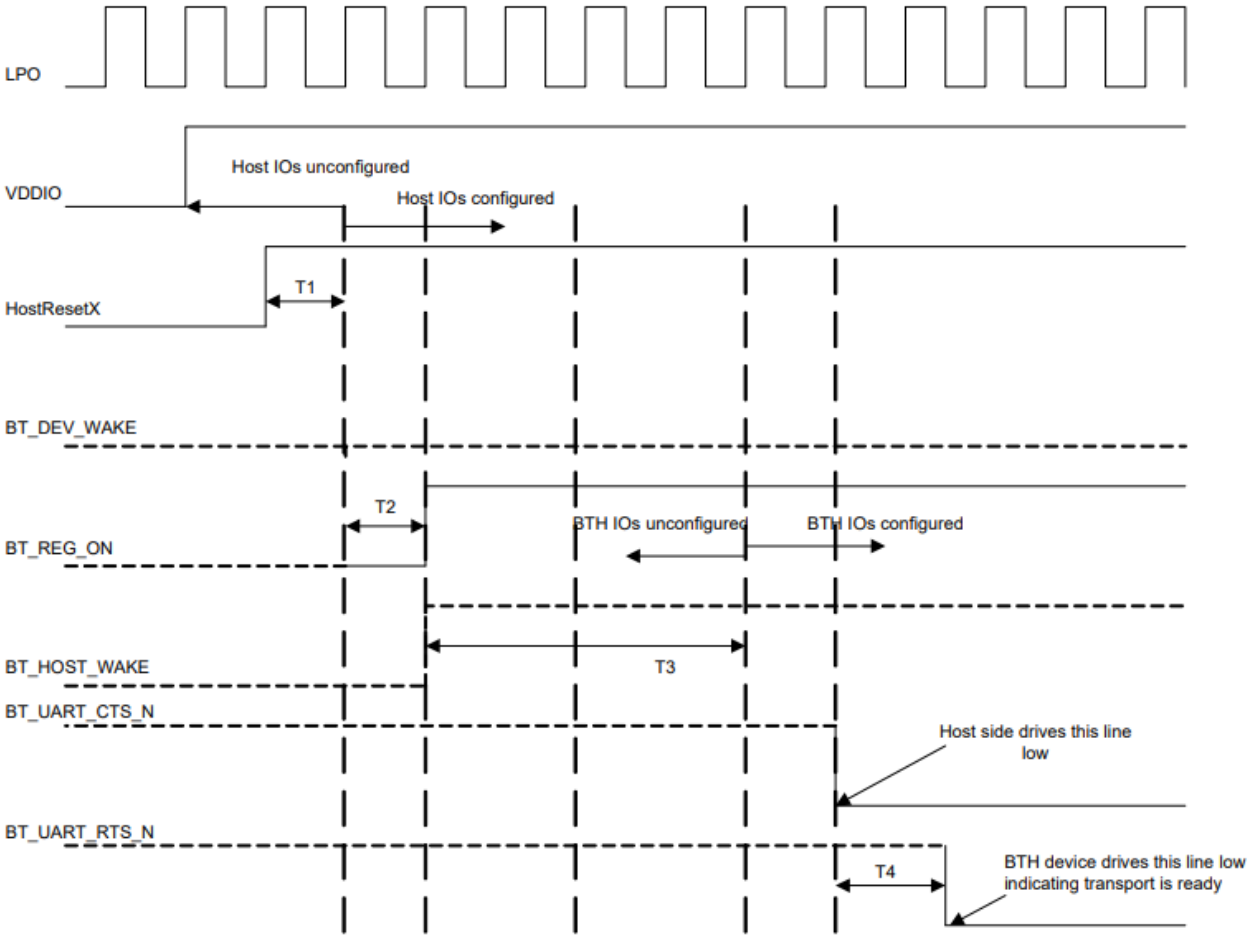

Notes :
T1 is the time for Host to settle it's IOs after a reset.
T2 is the time for Host to drive BT_REG_ON high after the Host IOs are configured.
T3 is the time for BTH (Bluetooth) device to settle its IOs after a reset and reference clock settling time has elapsed.
T4 is the time for BTH device to drive BT_UART_RTS_N low after the Host drives BT_UART_CTS_N low. This assumes the BTH device has already completed initialization.

AMPAK Technology Inc.
6F.-2, No. 23, Huanke 1st Rd., Zhubei City, Hsinchu County 302047 , Taiwan
http://www.ampak.com.tw

UART Timing

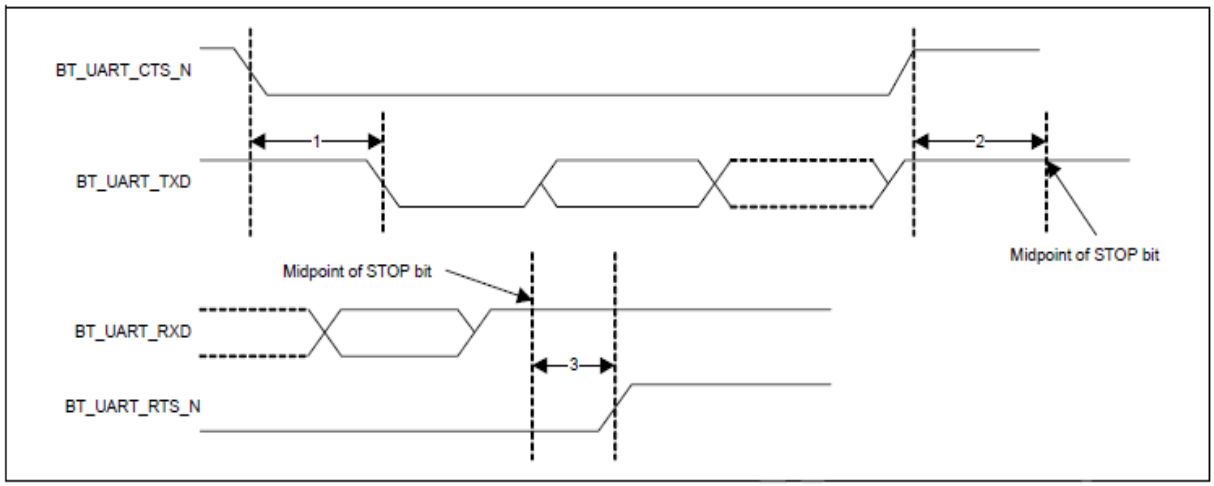


UART Timing Specifications

Ref	Characteristics	Min.	Typ.	Max.	Unit
1	Delay time, BT_UART_CTS_N low to BT_UART_TXD valid	–	–	1.5	Bit periods
2	Setup time, BT_UART_CTS_N high before midpoint of stop bit	–	–	0.5	Bit periods
3	Delay time, midpoint of stop bit to BT_UART_RTS_N high	–	–	0.5	Bit periods

AMPAK Technology Inc.
6F.-2, No. 23, Huanke 1st Rd., Zhubei City, Hsinchu County 302047 , Taiwan
http://www.ampak.com.tw

9. Recommended Reflow Profile

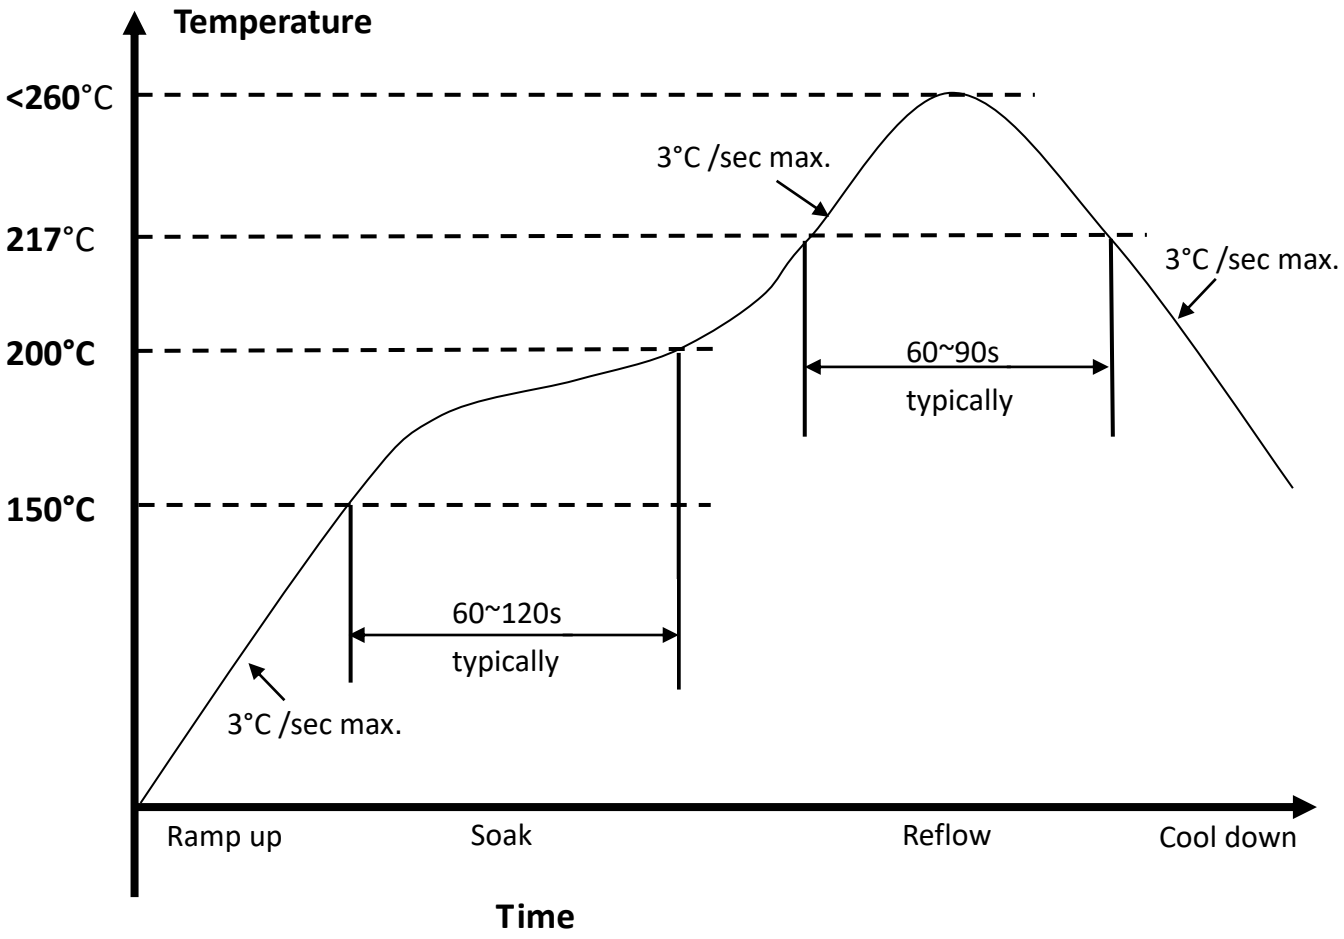


1. Referred to IPC/JEDEC standard
2. Peak Temperature : <260°C
3. Cycle of Reflow : 2 times max.
4. Adding Nitrogen (N2) to implement 2000ppm or less of oxygen concentration during reflow process is recommended.
5. If the shelf time is exceeded, be sure baking step to remove the moisture from the component.

AMPAK Technology Inc.
6F.-2, No. 23, Huanke 1st Rd., Zhubei City, Hsinchu County 302047 , Taiwan
http://www.ampak.com.tw

10. Package Information


10.1 Marking



Rows	Content	Note
Row 1	XXXXXXXX	Model Name
Row 2	XXXXXXXX or XXXXXXXXX (8 digitals or 9 digitals)	Lot Code
Row 3	YYWW	Date Code
Row 4	Through hole or non through hole	Pin 1

10.2 Tape & Reel Date


Reel

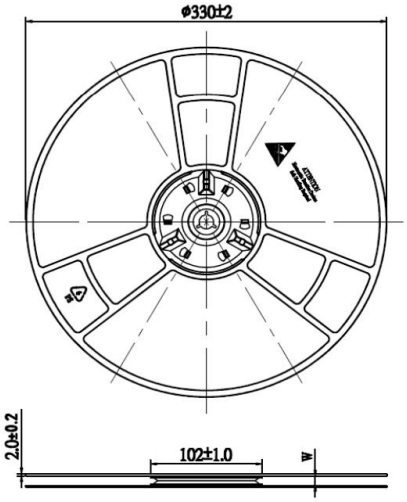

(unit :mm)



Carrier tape (unit :mm)

AMPAK Technology Inc.
6F.-2, No. 23, Huanke 1st Rd., Zhubei City, Hsinchu County 302047 , Taiwan
http://www.ampak.com.tw


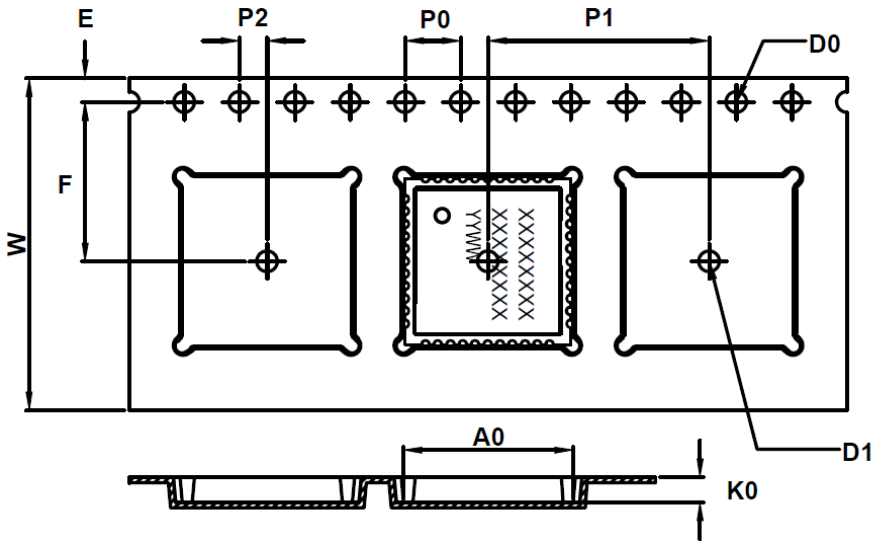


W	24.00±0.30
A0	12.30±0.10
B0	12.30±0.10
K0	1.80±0.10
E	1.75±0.10
F	11.50±0.10
P0	4.00±0.10
P1	16.00±0.10
P2	2.00±0.10
D0	1.50 +0.10 -0.00
D1	ϕ1.50MIN

10.3 Tape & Reel Packing

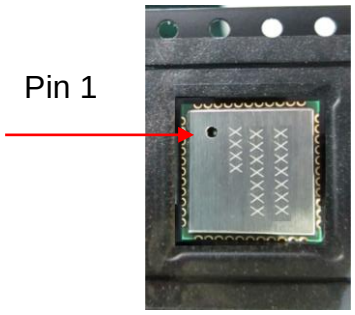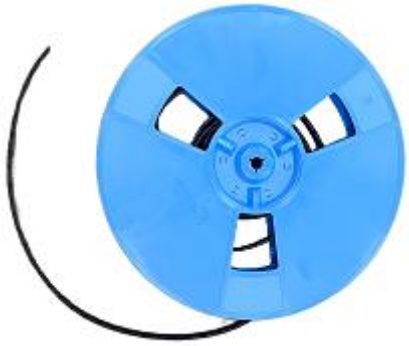Step	Photo	Description
1	Pin 1 	Pin 1 in schematic diagram in carrier tape
2		13” W24.0mm Reel


AMPAK Technology Inc.
6F.-2, No. 23, Huanke 1st Rd., Zhubei City, Hsinchu County 302047 , Taiwan
http://www.ampak.com.tw

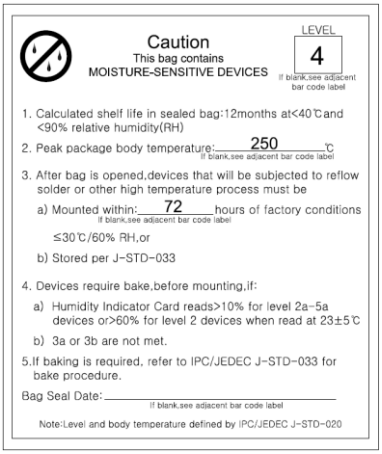3		Humidity Indicator Card & Desiccant inside
4		Caution label is on frontside of Al bag
5		Anti-static and humidity notice on frontside of Al bag
6		MSL Level / Storage Condition
7		1 reel per inner box (Box) Quantity:1500pcs/reel

AMPAK Technology Inc.
6F.-2, No. 23, Huanke 1st Rd., Zhubei City, Hsinchu County 302047 , Taiwan
http://www.ampak.com.tw

8	(1T)PKG S/N: XPKGYYMMDDnnnnn PO: NA (P)Model Name: XXXXXXXXXX (XXXX) (1P)P/N: XXX-XXX-XXXXR 51P P/N: XXX-XXX-XXXXR (L)Lot Code: XXXXXXXX (D)Date Code: YYWW (Q)Quantity: QQQQ Product size: 12x12mm MSL:4 Made in XXXXX RoHS H/F	Inner box (Box) label (Reel label/Al Bag label/Box label) The label content includes 1D barcode and QR CODE
9		5 inner boxes per outer box (Carton) Quantity: 7500pcs/outer box (Carton)
10		Outer box (Carton) Quantity: 7500pcs/outer box (Carton)

AMPAK Technology Inc.
6F.-2, No. 23, Huanke 1st Rd., Zhubei City, Hsinchu County 302047 , Taiwan
http://www.ampak.com.tw

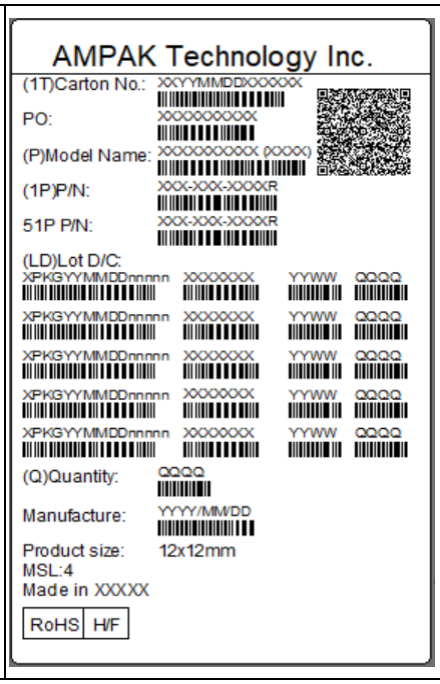11		Outer box (Carton) label The label content includes 1D barcode and QR CODE

AMPAK Technology Inc.
6F.-2, No. 23, Huanke 1st Rd., Zhubei City, Hsinchu County 302047 , Taiwan
http://www.ampak.com.tw