




Rev	Date	History	Name
1.0	13-10-10	新项目	xiang

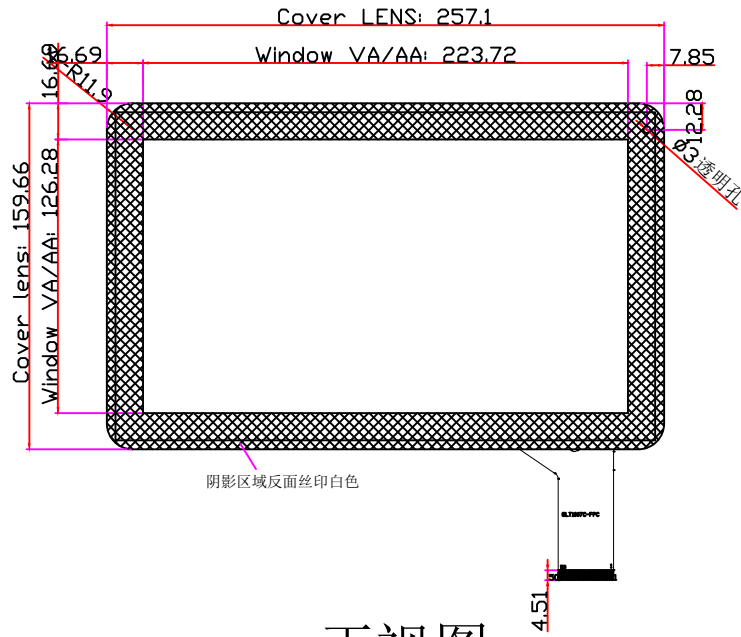

正视图

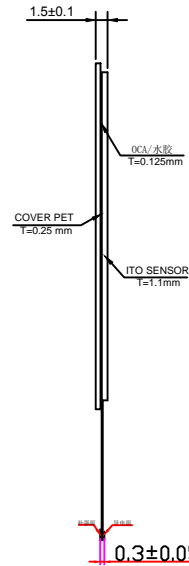

侧视图

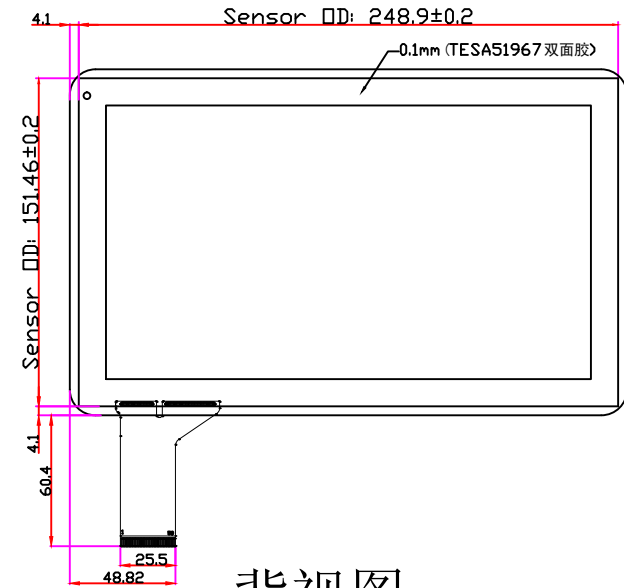

背视图

技术参数:

1. ITO GLASS+Cover GLASS+FPC
ITO GLASS: 1.1mm
Cover GLASS: 0.25mm
引线: FPC (PINCH=0.5mm)
2. 总厚度: 1.4±0.1mm
3. 工作电压: 2.8-3.3 V
4. 透光率: ≥85%
5. 表面硬度: 3H
6. 工作环境: -20℃~+70℃, ≤90%RH
7. 储存环境: -30℃~+80℃, ≤90%RH
8. 未注尺寸公差按±0.2mm
8. 使用IC()

PIN定义

1	GND
2-27	TX1-TX26
28-29	NC
30-31	GND
32-33	NC
34-49	RX16-RX1
50	GND

VTC5010A07-8.0

REVISIONS

SCALE	MATERIAL	TOLERANCE	Version
UNIT mm		±0.1mm	8.0
DESIGN xiang	DATE 20131010		NO: 1 of 1
CHECK	DATE		
RELEASE Victor	DATE		

Victor-touch Technology Co.,LTD.
深圳市伟拓光电技术有限公司